



LED Lighting Controller with Ethernet Connectivity

# OPPD-30 Series

## Easy Ethernet connectivity

- Automatic brightness management
- “FALUX sensing” for monitoring brightness and temperature monitoring and for controlling feedback




### Specifications

Model	PWM Frequency / Intensity Steps	Illumination Output	Capacity	Input Voltage	Weight [g]
<b>OPPD-30E</b>	100 kHz, 1,000 steps	2ch	Max. 30 W (total for 2 channels)	24 VDC ±10%	150

### Options (sold separately)


#### Panel mounting bracket

Model	Weight [g]
<b>BKT-OP-01</b>	30



#### Panel stand

Model	Weight [g]
<b>PNL-OPPD</b>	50

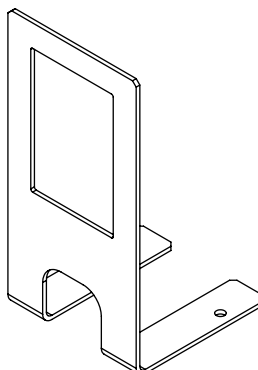

OPR	Ring
OPR-SF	Ring
OPB-S	Bar
OPF	Backlight
OPX	Coaxial
OPS-S	Spot

OPPD-15	Controllers
OPPD-30	
OPPF	

CB/RCB	Options
--------	---------



## Simplify lighting control with an Ethernet-connectable compact controller



### OPPD-30E

Size: W48 × H72 × D72 mm  
 Communication method: Ethernet  
 Capacity: 30 W  
 Illumination output: 2 ch

OPPD-30E is an LED lighting controller with Ethernet connectivity that reduces the effort required for lighting control. Due to the simple configuration of light intensity and ON/OFF control for lighting from a PC or a PLC, the OPPD-30E can be used in a variety of engineering environments in the manufacturing field. The OPPD-30E also makes it easy to catch decreases in lighting brightness, allowing for predictive lighting maintenance through IoT (Internet of Things) setups.


Ring	OPR
	OPR-SF
Bar	OPB-S
Backlight	OPF
Coaxial	OPX
Spot	OPS-S
Controllers	OPPD-15
	OPPD-30
	OPPF
Options	CB/RCB

## Features

### ■ Simple light intensity and ON/OFF control through Ethernet communication Connecting is simple. Just plug in a LAN cable!

With support for DHCP, the OPPD-30E automatically obtains IP addresses and other information necessary for connection.

Manual configuration of network settings required with conventional models is unnecessary, and communication can be easily established simply by connecting a LAN cable within a DHCP server network environment.

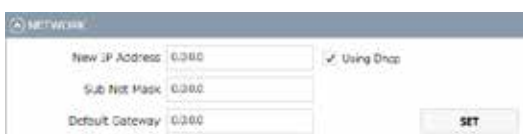



■ High-speed communication

With the OPPD-30E, light intensity values can be rewritten for both channels in about 6 ms.

**OPPD-30E : Approx. 6 ms / 2 ch**

Conventional Optex FA models : Approx. 11 ms / 2 ch

Other manufacturer products or equivalent : Approx. 18 ms / 1 ch

■ Simple PC software-based setup

Dedicated PC software is available for the OPPD-30E. This software can be used to configure light intensity, ON/OFF control and frequency, among other aspects.

Access the Optex FA homepage to download the software for free.

\*LAN cable required separately.




● Intuitively operable interface

The software interface has been developed so that light intensity and ON/OFF control can be seen at a glance. Settings can be easily configured through pull-down menus or through direct input.

● Configurable settings

- PWM frequency
- Illumination control input selection
- Light intensity value/ Light emission width
- Lighting delay time
- Feedback
- Monitor brightness alarm, etc.

Connected lighting is detected automatically.

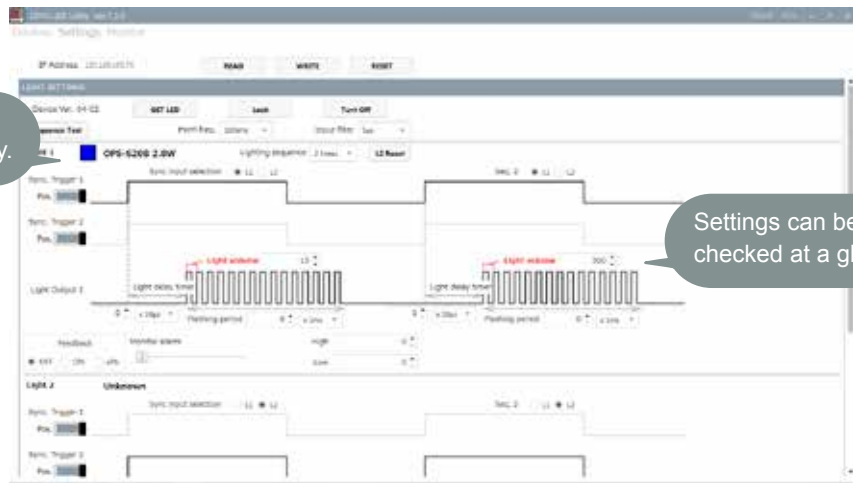

Settings can be checked at a glance.

\*Screen content and layout subject to change.

OPR	Ring
OPR-SF	
OPB-S	Bar
OPF	Backlight
OPX	Coaxial
OPS-S	Spot
OPPD-15	Controllers
OPPD-30	
OPPF	
CB/RCB	Options



■ **Compact size**


Thanks to high-density mounting technology and an optimum heat dissipation design, the OPPD-30E boasts a size just 38% that of OPPF Series products.

**OPPF Series**

Built-in sensing function  
Illumination output: 2 ch / 48 W  
Size: W40 × H158 × D104 mm

**OPPD-30E**

Ethernet connectivity  
Built-in sensing function  
Illumination output: 2 ch / 30 W  
Size: W48 × H72 × D72 mm

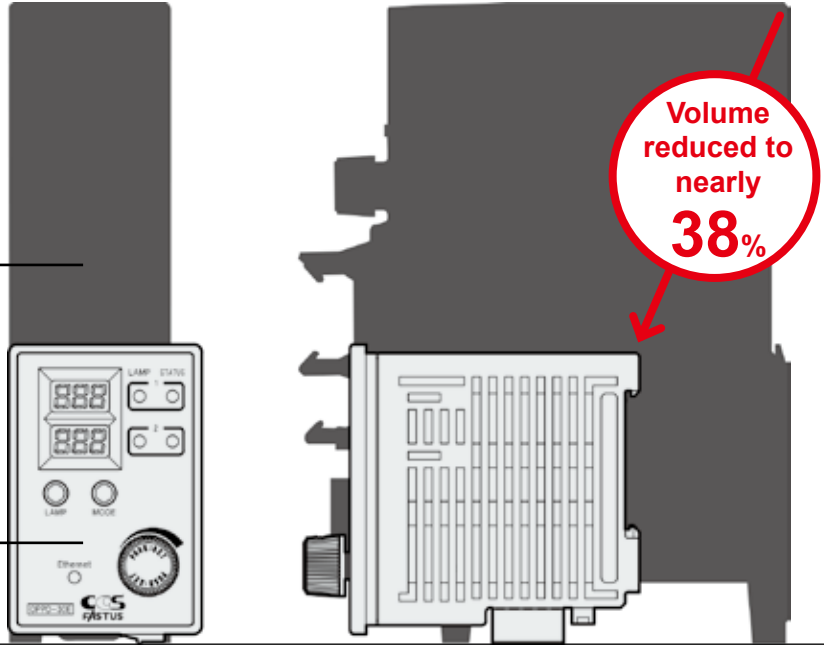


Front

Side


Ring	OPR
	OPR-SF
	OPB-S
Backlight	OPF
Coaxial	OPX
Spot	OPS-S
Controllers	OPPD-15
	OPPD-30
	OPPF
Options	CB/RCB

**Connection to external device (illumination control)**

■ **With NPN open collector output device**

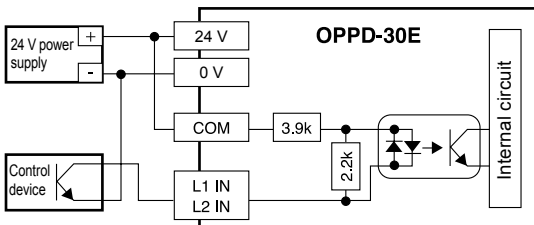

■ **With PNP open collector output device**

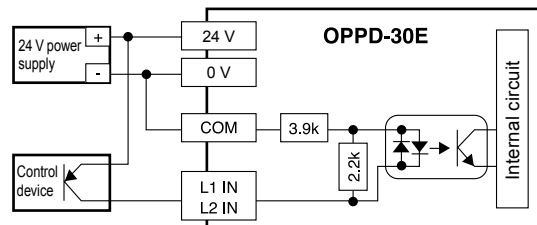

\*When connecting voltage output control equipment, apply 12 to 30 VDC between IN and COM. The photocoupler input is bipolar.




■ New lighting control features

**Illumination control input allocation function**

An industry first!


With conventional models, one lighting output is allocated per controller input. With the OPPD-30E, users can switch between one or two lighting units for every input at the controller. In addition to reducing the number of wiring, the OPPD-30E enables flexible input changes even after wiring has been completed.

Conventional setup

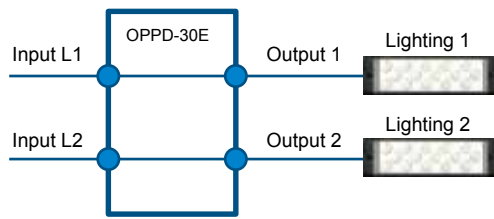


Allocation examples

Ex. 1: Simultaneous output to 2 channels for 1 input

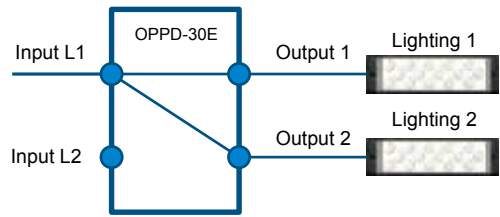

Ex. 2: Switchable output

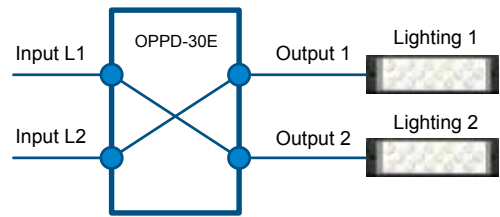


**Lighting control sequence**


An industry first!

With the OPPD-30E, up to four illumination setting patterns including light intensity values can be configured. Each pattern can be configured in an illumination control sequence with ordered switching for each illumination control input. (Lighting delay time settings are shared.) With intensity values and illumination widths set in advance, automatic switching is only performed for illumination control input, allowing the time required for changing settings to be kept to a minimum. With conventional models, control is not possible without using a PLC and setting up complex ladders. With the OPPD-30E, such control can be achieved with no other equipment required.

Ex. 1: Light intensity value and emission width switching

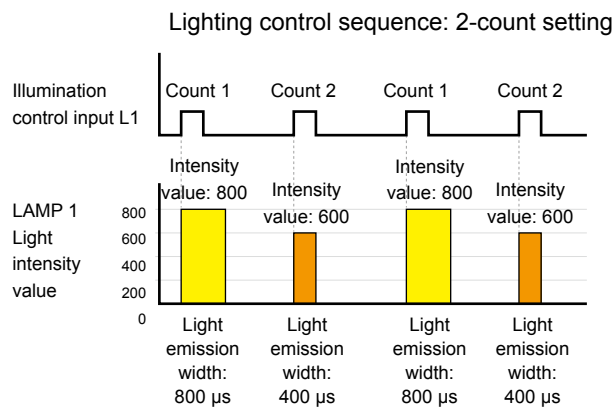

Ex. 2: Lighting switching

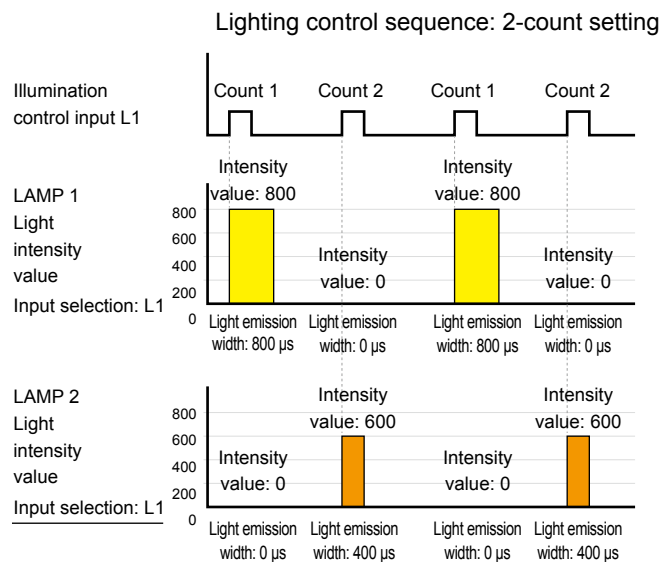




■ Automatic brightness management and predictive lighting maintenance



Brightness/temperature monitoring and feedback control

Connecting the OPPD-30E to lighting equipped with “FALUX sensing” enables monitoring of the lighting brightness and temperature.

Based on these monitored values, light intensity feedback control can be performed, allowing brightness to be kept constant.

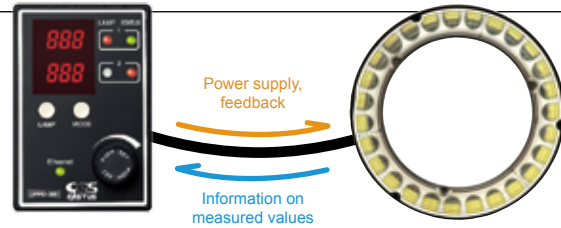

● Monitoring function

The lighting’s built-in photodiodes are used to monitor the brightness of the lighting.

**Alarm output:** Setting a threshold in advance makes it possible to output an alarm when brightness decreases to a predetermined level.

**Instrumental error adjustment:** Absolute brightness monitoring makes it possible to adjust for lighting instrumental errors.

● Light intensity feedback control

Automatic brightness management

With LED lighting, decreases in brightness can occur due to various factors including drops in voltage caused by extension cables and LED deterioration.

The factory default brightness is maintained through automatically corrected intensity values to prevent drops in brightness. Corrections can be verified as “Corrected intensity value.”


The feedback range is determined by the set intensity value and the maximum intensity value (999).

A signal is output as a feedback error when the maximum intensity value is reached.

[Feedback mechanism]


OPPD-30E

The PWM ON time is corrected according to changes in brightness, allowing brightness to be automatically adjusted.

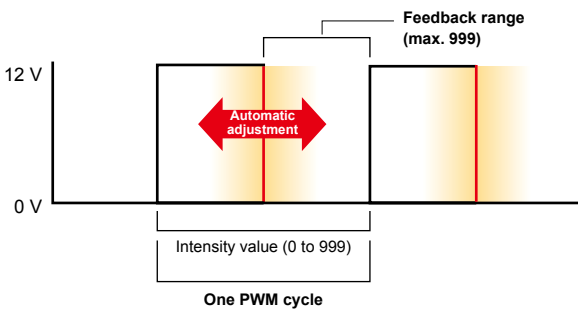

<Reference> OPPF Series

Output voltage is corrected according to changes in brightness, allowing brightness to be automatically adjusted.

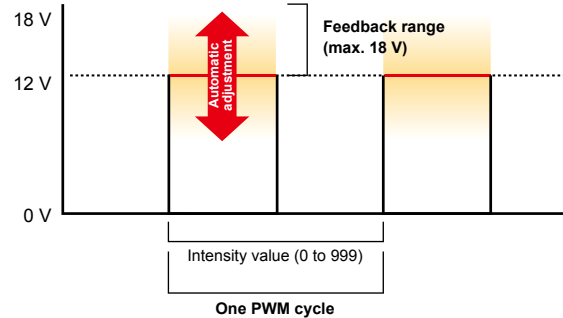

Measured brightness/temperature logging function

Measured values such as brightness and temperature can be collected and displayed in a graph using the dedicated software (PC).

Data can be output as a .csv file. Displaying monitored values allows users to recognize LED degradation. This feature is useful as a function for predictive lighting maintenance.

● Recordable items

- Light intensity value • Monitored value
- Corrected intensity value
- Lighting temperature
- Controller temperature

Monitor screen (dedicated software)



Ring	OPR
	OPR-SF
Bar	OPB-S
Backlight	OPF
Coaxial	OPX
Spot	OPS-S
Controllers	OPPD-15
	OPPD-30
	OPPF
Options	CB/RCB




Specifications	
<b>Model</b>	<b>OPPD-30E</b>
<b>Power supply voltage</b>	24 VDC ±10%
<b>Current consumption</b>	Max. 1.3 A
<b>Illumination output</b>	2 ch
<b>Connectable lighting</b>	Max. 30 W (total for 2 channels)
<b>Illumination output voltage</b>	PWM mode: 12 VDC
<b>Illumination output current</b>	Max. 2.5 A (total for 2 channels)
<b>Light intensity control</b>	PWM intensity control, Frequency: 50/100/99/98/97 kHz
<b>Monitoring</b>	Lighting brightness monitor / Lighting internal temperature monitor, Monitor brightness alarm upper/lower limit value setting
<b>Feedback</b>	PWM correction method
<b>Input</b>	External illumination control × 2 ON voltage: 12 V or more, OFF voltage: 2 V or less, Max. input voltage: 30 V Input response time (actual value) With 24 V input (OFF→ON: 5 μs), (ON→OFF: 50 μs) With 12 V input (OFF→ON: 8 μs), (ON→OFF: 45 μs) Input resistance: 3.9 kΩ, insulated
<b>Communication interface</b>	Ethernet 10BASE-T/100BASE-TX, AutoMDI-X
<b>Communication protocol</b>	UDP/IP, DHCP
<b>Communication response speed</b>	From command reception to response completion: 6 ms (typ.)
<b>Protective functions</b>	Overcurrent, controller internal temperature monitoring (PWM output cut to 1/4 at 105°C)
<b>Regulations</b>	Conforms to EMC (2014/30/EU) / RoHS (2011/65/EU, directive 32)
<b>Standards</b>	Conforms to EN 61326-1: 2013, EN 55011: 2009 / A1: 2010 Group 1, Class A
<b>Protection rating</b>	IP30 (IEC 60529: 1989 / A1: 1999 + A2: 2013)
<b>Ambient temperature/humidity</b>	0 to 40°C / 35 to 85% RH (no condensation)
<b>Storage temperature/humidity</b>	-20 to 70°C / 35 to 95% RH (no condensation)
<b>Vibration resistance</b>	10 to 55 Hz; amplitude: 1.5 mm; 2 hours in each of the X, Y, and Z directions
<b>Shock resistance</b>	Approximately 10 G, 3 times in each of the X, Y, and Z directions
<b>Insulation resistance</b>	500 VDC, 10 MΩ or more
<b>Material</b>	Housing: Polycarbonate and aluminum
<b>Weight</b>	150 g
<b>Accessories</b>	Instruction manual, Terminal block × 1
<b>Options</b>	Panel mounting bracket, Panel stand

OPR	Ring
OPR-SF	
OPB-S	Bar
OPF	Backlight
OPX	Coaxial
OPS-S	Spot
OPPD-15	Controllers
OPPD-30	
OPPF	
CB/RCB	Options

■ Required 24 VDC power supply capacity to handle power consumption of lighting

Based on the total power consumption of the LED lighting to be connected, select a 24 VDC power source that offers more than the required capacity.

Note:  
When using in conjunction with other equipment, the characteristics of the other equipment will affect the power supply, so be sure to choose a power supply that has a sufficient margin (about twice as much) as that shown in the graph.

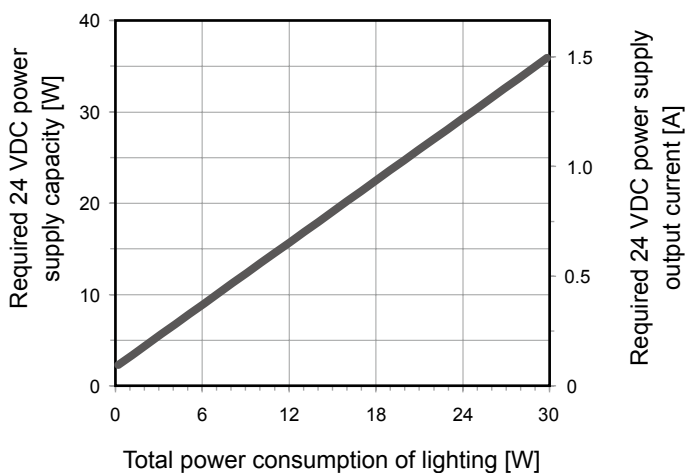




Dimensions


(unit: mm)

■ Main unit

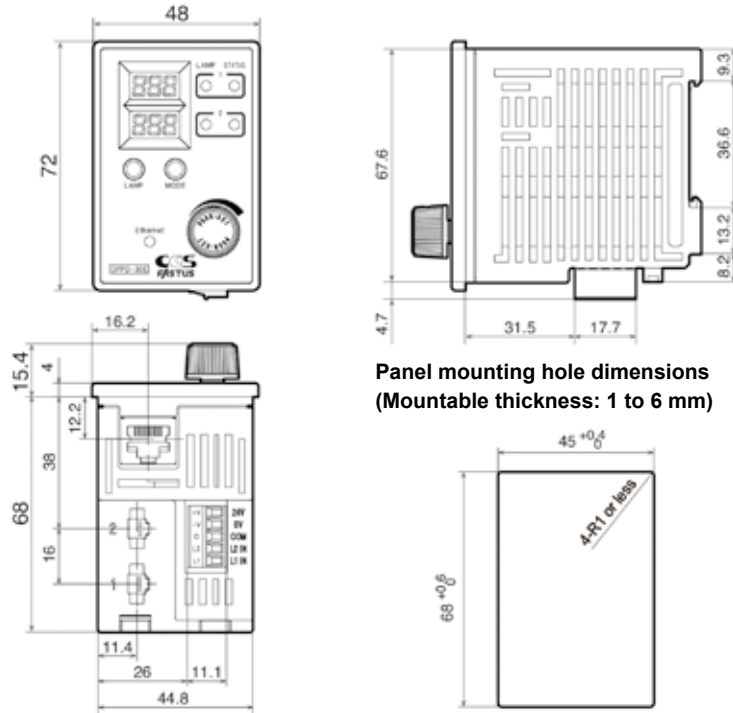


■ Options (sold separately)

Panel mounting bracket  
BKT-OP-01

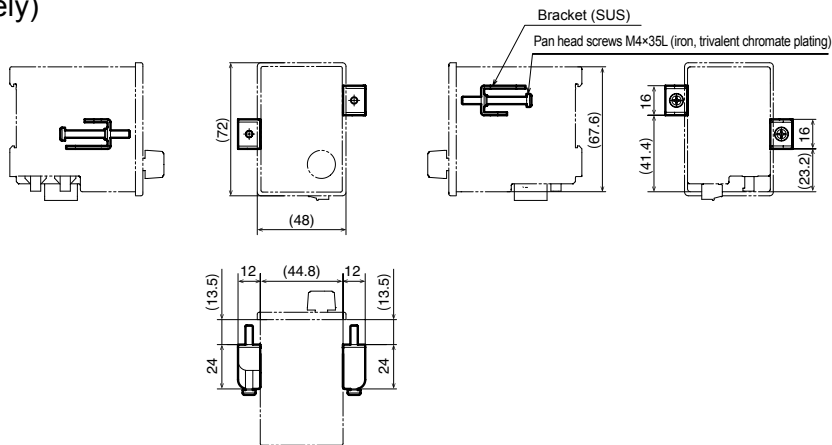

Panel stand  
PNL-OPPD

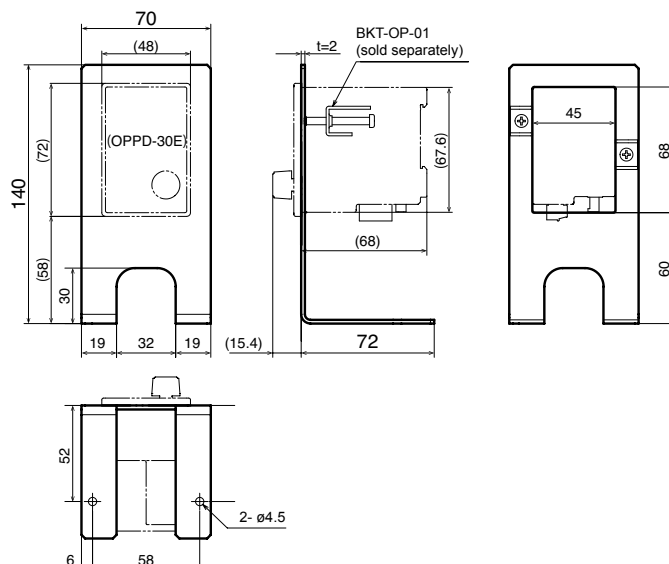

Ring	OPR
	OPR-SF
Bar	OPB-S
Backlight	OPF
Coaxial	OPX
Spot	OPS-S
Controllers	OPPD-15
	OPPD-30
	OPPF
Options	CB/RCB