

Analog Video


CCXC Style - VCS-xx-B*

Product Outline

This video breakout cable consists of a standard 12 pos circular connector with BNC video output connectors, DC power leads, and chassis ground.

In addition to the overmolded connectors, the breakout junction is also overmolded. This provides both a clean, professional appearance as well as eliminates the potential failure point with increased strain relief.

Configurations are available with 1-5 BNC's, S-Video, or RCA breakouts. High flex, double shielded, and Teflon versions are available.

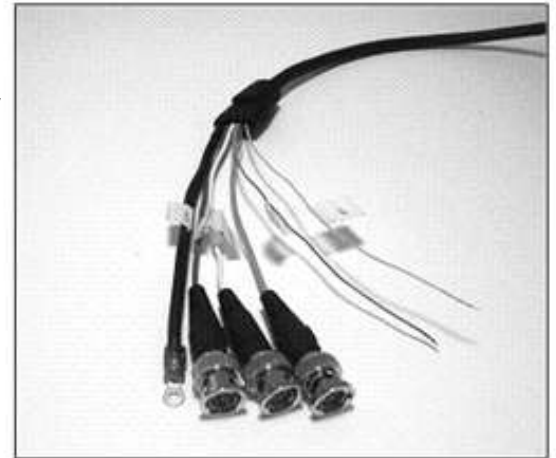

Main Product Specifications

Features

- Overmolded connectors
- Overmolded breakouts
- Multiple breakout variations
- 75 Ohm video
- Multiple jacketing options to fit your application

Cable Specifications

Overall Diameter	.270 Inches
Max Temperature	80 Degrees C
Jacket Color	Black
UL/CSA Rated	Yes
Min. Bend Radius	4.05 Inches
Flame Rating	VW-1

Primary Components

Cable	75 Ohm coax , 24 AWG discrete wires
Connector A	12 Position Circular
Connector B	75 Ohm BNC

Ordering Information

Length

Order Number	Length		Description
	Meters	Feet	
VCS-XX-B1			12 Pos. Breakout to 1 BNC, PWR
VCS-XX-B2			12 Pos. Breakout to 2 BNC, PWR
VCS-XX-B3			12 Pos. Breakout to 3 BNC, PWR
VCS-XX-B4			12 Pos. Breakout to 4 BNC, PWR
VCS-XX-B5			12 Pos. Breakout to 5 BNC, PWR

XX- is replaced by the length in Meters.

Custom variations are available. Please contact customer service for additional information.

