

Analog Video

Right Angle CCXC Style - VCS*-xx-P

Product Outline

These industrial CCXC style assemblies offer a unique right angle overmold for applications requiring an immediate turn behind the interface. The common configuration consists of a right angle on the camera (socket) end and an overmolded straight connector on the equipment end. However both connectors are available with a right angle.

These assemblies can be produced in a variety of options including high flex and Teflon cable types to best fit your application.


Orientations are available in up, down, left, and right.



Main Product Specifications

Features

- Right angle overmolded connectors
- Controlled Impedance 75 Ohm video conductors
- Superior long length performance
- RoHS Compliant versions are available

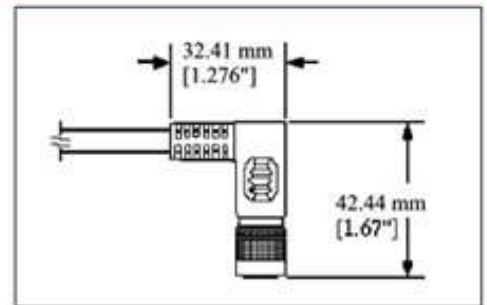

Cable Specifications	
Overall Diameter	.270 Inches
Max Temperature	80 Degrees C
Jacket Color	Black
UL/CSA Rated	Yes
Min. Bend Radius	4.05 Inches
Flame Rating	VW-1

Primary Components	
Cable	4 Coax conductors, 4 Discrete wires
Connector A	12 Pos Circular Plug W / Sockets
Connector B	12 Pos Circular Plug W / Pins

Ordering Information

Order Number	Length		Description
	Meters	Feet	
VCS*-1.0-P	1.0	3.28	Right Angle Analog CCXC Style
VCS*-2.0-P	2.0	6.58	Right Angle Analog CCXC Style
VCS*-3.0-P	3.0	9.84	Right Angle Analog CCXC Style
VCS*-5.0-P	5.0	16.94	Right Angle Analog CCXC Style
VCS*-10-P	10	32.81	Right Angle Analog CCXC Style

Please replace * with "U" for up, "D" for down, "R" for right, or "L" for left.

Custom variations available. Please contact customer service for additional information.

