



RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST EDITION	2009/02/12	

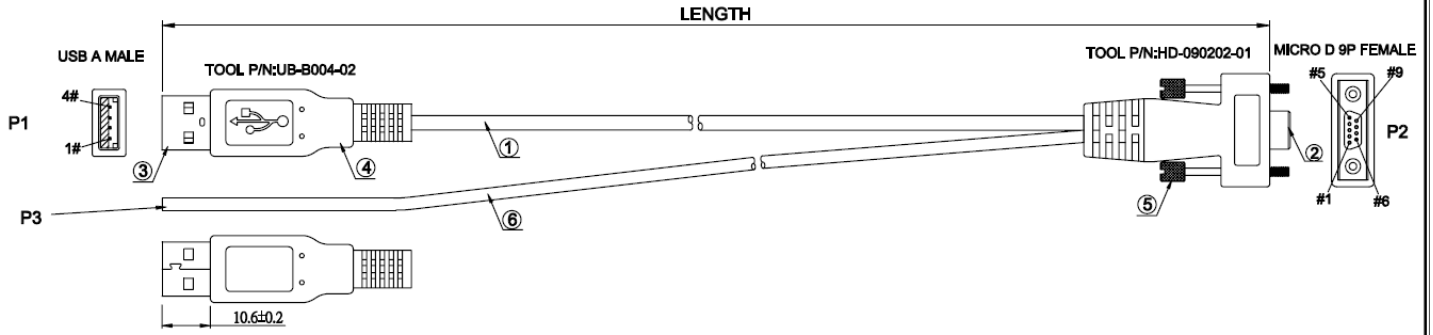


- NOTES:**
- PIN ASSIGNMENT SEE TO WIRE LIST.
 - ELECTRICAL TEST CONDITION:
 - 100% OPEN, SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE: 20 Mohm MIN, DC 300V 0.01sec; 0.03sec,
 - CONTACT RESISTANCE: 3 ohm MAX.

PART NO.	LENGTH
CY-S-0467-03M	3000±50
CY-S-0467-05M	5000±50

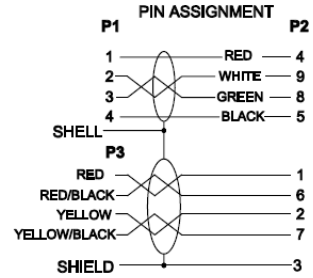

ITEM	QTY	PART NUMBER	DESCRIPTION
6	1	Sa04368-1	28AWG*2PAIR+ADB,OD:3.2MM UL2725 BLACK PVC JACKET.
5	2	C0347	SCREW:M1.6 3.0*20MM,NICKEL PLATED.
4		G0001	ALL CONNECTOR OVERMOLD BLACK PVC.
3	1	A0114	USB A TYPE ,MALE ,GOLD PLATED 30°.SOLDER TYPE.
2	1	A0550	MICRO D 9P FEMALE, SOLDER TYPE,BLACK INSULATOR.WITH M1.6 AND M3 SCREW.
1	1	E0849 H7304R	28AWG*1P+26AWG*2C-AM-SP-FPP. OD:4.5MM UL20276 BLACK PVC JACKET.



6604 Harney Rd. STE B Tampa, FL USA 33610
 Phone: 813.984.0125 Fax: 866.874.9521
 E-mail: sales@pyramidimaging.com
 Web Address: www.pyramidimaging.com

Inspect... Analyze... Solve!