


945 East 11th Avenue Tampa, FL 33605
 Phone: (813) 984-0125
 Contact: Sales@pyramidimaging.com
<https://pyramidimaging.com>

① IRIS CABLE (+) RED INPUT VOLTAGE
 (-) BLACK GROUND
 WHITE VIDEO SIGNAL
 GREEN REMOTE CONTROL

② MOTOR CABLE (+) GREEN FOCUS NEAR
 (+) BLACK FOCUS FAR
 (+) YELLOW TELE
 (+) RED WIDE

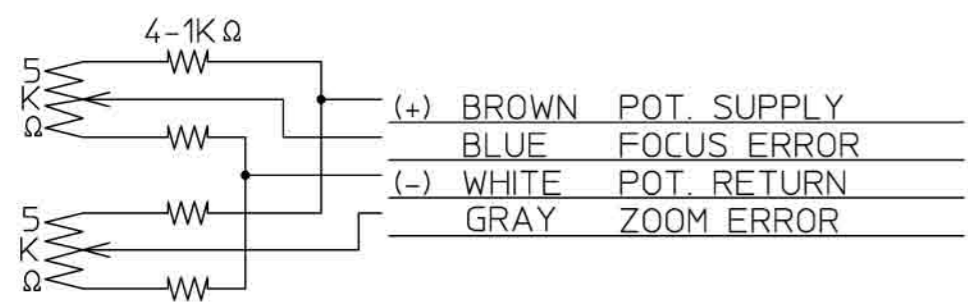


SPECIFICATION

1. USE	FOR 1/2" COLOR B/W CAMERA		
2. FOCAL LENGTH	f=8~120mm		
3. IRIS RANGE	F= 1.8 ~ 360		
4. IMAGE SIZE	φ 8 (6.4 x 4.8)		
5. BACK FOCAL LENGTH	14.9 mm in air		
6. FLANGE FOCAL LENGTH	17.526 mm in air		
7. FOCUS RANGE	∞ ~ 1.5 m		
8. FIELD ANGLE	DIA.	(W)	(T)
	HOL.	43.2°	3.1°
	VER.	32.8°	2.3°
9. DISTORTION (TV)	-0.7% 1.1%		
10. LENS CONSTRUCTION	15 GROUPS 18 ELEMENTS		
11. CLEAR APERTURE	FRONT	φ 54	REAR φ 12.5
12. WEIGHT	**Kg		

DC (DIRECT CONTROL)

DRIVE COIL	RESISTOR	190Ω (20°C)
	COLOR	RED(+) 3pin BLACK 4pin
BRAKE COIL	RESISTOR	1150Ω (20°C)
	COLOR	YELLOW(+) 2pin GREEN 1pin
DRIVE VOLT.	OPEN	LESS THAN +4V
	CLOSE	OVER THAN 0V W/CLOSING SPRING

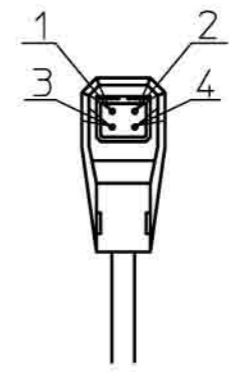

1/2" 1.8/8-120mm
 LMZ0812AM/AMP-IR
 LMZ0812AMDC/AMPDC-IR

