



① IRIS CABLE	(+) RED	INPUT VOLTAGE
	(-) BLACK	GROUND
	WHITE	VIDEO SIGNAL
	GREEN	REMOTE CONTROL

② MOTOR CABLE	(+) GREEN	FOCUS NEAR
	(+) BLACK	FOCUS FAR
	(+) YELLOW	ZOOM IN
	(+) RED	ZOOM OUT

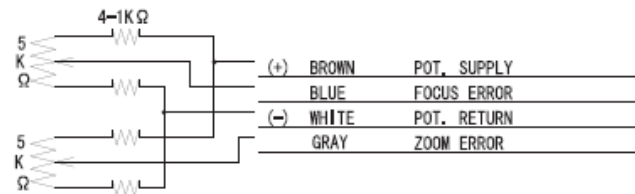

SPECIFICATION	
1. USE	FOR 1/3" COLOR B/W CAMERA
2. FOCAL LENGTH	$f=5.5 \sim 165$ mm
3. IRIS RANGE	$F=1.8 \sim 500 \sim \text{Close}$
4. IMAGE SIZE	$\phi 6 (4.8 \times 3.6)$
5. BACK FOCAL LENGTH	15.5 mm in air
6. FLANGE FOCAL LENGTH	12.5 mm in air
7. FOCUS RANGE	$\infty \sim 1.8$ m
8. FIELD ANGLE	DIA. (W) 58.7 ° (T) 2.10 °
	HOR. 47.6 ° 1.70 °
	VER. 33.9 ° 1.30 °
9. FIELD OF VIEW AT W.L.D.	DIA. 1.879 mm 62.8 mm
	HOR. 1.492 mm 50.6 mm
	VER. 1.107 mm 38.1 mm
10. DISTORTION	-2.5 % 0.7 %
11. LENS CONSTRUCTION	12 GROUPS 14 ELEMENTS
12. CLEAR APERTURE	FRONT $\phi 60$ REAR $\phi 10.5$
13. EXIT PUPIL POSITION	-70.0 mm (ϕ format)
14. WEIGHT	850 g (880 g)

DC (DIRECT CONTROL)		
DRIVE COIL	RESISTOR	190 Ω (20° C)
	COLOR	RED (+) BLACK
BRAKE COIL	RESISTOR	1150 Ω (20° C)
	COLOR	YELLOW (+) GREEN
DRIVE VOLT.	OPEN	LESS THAN +4V
	CLOSE	OVER THAN 0V
		W/CLOSING SPRING



AUTO IRIS
1/3" F1.8/5.5 ~ 165mm

LMZ300AM AMP
LMZ300AMDC AMPDC