


1" 0.8/60mm CS		2/3"	1/2"
FOCAL LENGTH	f=60mm		
MAX. DIAMETER (RATIO)	F=1:0.8		
PICTURE SIZE	9.6x12.8	6.6x8.8	4.8x6.4
ANGLE	VER. ANGLE	9.6°	6.6°
	HOR. ANGLE	12.8°	8.8°
	DIA. ANGLE	16.0°	11.0°
DISTORTION (TV)	-0.15%	-0.15%	-0.08%
MINIMUM FOCUS DISTANCE	3m		
FLANGE BACK	12.5 mm in air		
BACK FOCUS	20mm in air		
FILTER SCREW SIZE	M77x0.75		
FRONT/REAR EFFECTIVE DIA.	前φ70.0mm		後φ25.8mm
MOUNT	CS-MOUNT		
EXIT PUPIL	-278.1mm		
TEMPERATURE RANGE	-10~+50°C		
STORAGE TEMPERATURE RANGE	-20~+60°C		
RESOLUTION CENTER/CORNER	中心120本/mm		周辺100本/mm
WEIGHT	g		

DC (DIRECT CONTROL)

DRIVE COIL	RESISTOR	190Ω (20°C)
	COLOR	RED(+) 3pin BLACK 4pin
BRAKE COIL	RESISTOR	1150Ω (20°C)
	COLOR	YELLOW(+) 2pin GREEN 1pin
DRIVE VOLT.	OPEN	LESS THAN +4V
	CLOSE	OVER THAN 0V W/CLOSING SPRING

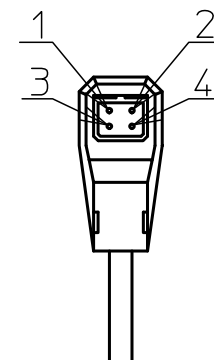

Pyramid Imaging

945 East 11th Avenue Tampa, FL 33605

sales@pyramidimaging.com

www.pyramidimaging.com

813-786-3785

		尺度 1/1	承認 Y	製図 Y
		機種名	f60mm/F0.8	
		機種番	LM60JS5MA 外觀図	
2014.5.9	作成年月日			