

① IRIS CABLE
(VIDEO TYPE)

RED +8V~+16V 35mA以下(9V)
 BLACK GROUND
 WHITE VIDEO SIGNAL >100kΩ
 GREEN REMOTE CONTROL
 0.5~1.0Vpp

② MOTOR CABLE


(+) GREEN FOCUS NEAR
 (+) BLACK FOCUS FAR
 (+) YELLOW ZOOM IN
 (+) RED ZOOM OUT

SPECIFICATION

1. USE	FOR 1/2" COLOR ,B/W CAMERA		
2. FOCAL LENGTH	f=15~375mm		
3. IRIS RANGE	F= 2.3 ~ 360		
4. IMAGE SIZE	φ 8 (6.4 x 4.8)		
5. BACK FOCAL LENGTH	24	mm	in air
6. FLANGE FOCAL LENGTH	17.526	mm	in air
7. FOCUS RANGE	∞ ~ 2.5 m		
8. FIELD ANGLE	DIA.	(W) 28.7°	(T) 1.24°
	HOL.	23.2°	0.99°
	VER.	17.6°	0.75°
9. DISTORTION (TV)	0.3 %	0.4 %	
10. LENS CONSTRUCTION	12 GROUPS 16 ELEMENTS		
11. CLEAR APERTURE	FRONT φ104	REAR φ11.7	
12. WEIGHT	2.58Kg (DP)		


DC (DIRECT CONTROL)

DRIVE COIL	RESISTOR	190Ω (20°C)
	COLOR	RED(+) 3pin BLACK 4pin
BRAKE COIL	RESISTOR	1150Ω (20°C)
	COLOR	YELLOW(+) 2pin GREEN 1pin
	DRIVE VOLT.	LESS THAN +4V OVER THAN 0V W/CLOSING SPRING

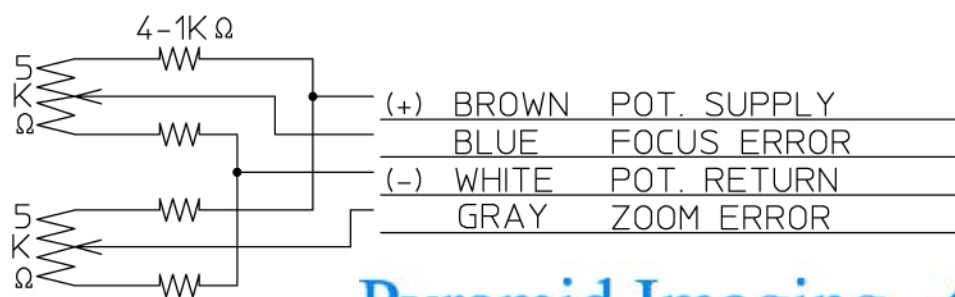

Pyramid Imaging

Pyramid Imaging Inc • 945 East 11th Avenue • Tampa, FL 33605 • +1 813 984 0125 • sales@pyramidimaging.com • pyramidimaging.com

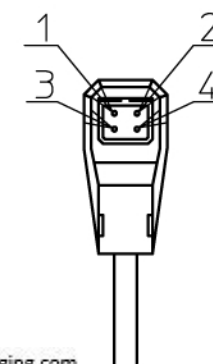

品名 1/2" F2.3/15-375mm

LMZ375AMP-XF
LMZ375AMPDC-XF

部番