


(1) IRIS CABLE (VIDEO TYPE)

+8V~+16V 35mA以下(9V) BLACK GROUND WHITE VIDEO SIGNAL >100kΩ
GREEN REMOTE CONTROL
0.5~1.0Vpp

(2) MOTOR CABLE

(+) GREEN FOCUS NEAR (+) BLACK FOCUS FAR (+) YELLOW ZOOM IN (+) RED ZOOM OUT

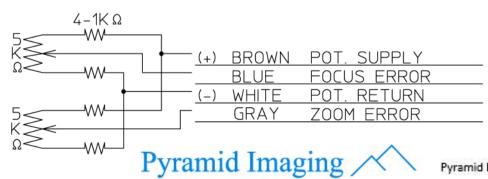


CDECIEIC A TIONI	
SPECIFICATION	

1.	USE	FOR 1/2" COLOR ,B/W CAMERA
2.	FOCAL LENGTH	f=15~375mm
3.	IRIS RANGE	$F = 2.3 \sim 360$
4.	IMAGE SIZE	Ø 8 (6.4 × 4.8)
5.	BACK FOCAL LENGTH	24 mm in air
6	FLANGE FOCAL LENGTH	<u> 17.526 mm in air</u>
_7	FOCUS RANGE	∞~ 2.5 m
8	FIELD ANGLE DIA.	(W) 28.7° (T) 1.24°
	HOL.	<u>23.2 ° </u>
	VER.	<u> </u>
9.	DISTORTION (TV)	0.3 % 0.4 %
10.	LENS CONSTRUCTION	12 GROUPS 16 ELEMENTS
_11.	CLEAR APERTURE F	<u> FRONT Ø 104 REAR Ø 11.7</u>
_12.	WEIGHT	2.58Kg (DP)

RESISTOR 190 Ω (20°C) DRIVE RED(+) COIL COLOR

3pin BLACK 4pin AKE RESISTOR COIL COLOR BRAKE 1150 Ω (20°C) YELLOW(+) 2pin GREEN DRIVE OPEN LESS THAN +4V VOLT. CLOSE OVER THAN OV





W/CLOSING SPRING

≈ 1/2" F2.3/15-375mm

LMZ375AMP-XF ■ LMZ375AMPDC-XF

Pyramid Imaging Inc • 945 East 11th Avenue • Tampa, FL 33605 • +1 813 984 0125 • sales@pyramidimaging.com • pyramidimaging.com