## computar

## **Pyramid Imaging**

945 East 11th Avenue Tampa, FL 33605 sales@pyramidimaging.com www.pyramidimaging.com 813-786-3785


1/2.5

## **L1028KDRW**

f = 1.05mm F2.8 Megapixel lens for 1/2.5 type Format Board Cameras, Fisheye, No Iris, IP66(L1) IR corrective

Model No.		L1028KDRW		Effective	Effective Front		φ 20mm	
Focal Length		1.05mm		Lens Aperture	Rear	φ 5.4mm	φ 5.4mm	
Max. Aperture Ratio		1:2.8		Distortion	Distortion		-96.66%	
Image Size at 180°		φ4.1		Back Focal Le	Back Focal Length		3.62mm	
Operation Range	Iris	-		Flange Back L	Flange Back Length		-	
	Focus	0.05m - Inf.		Mount	Mount		M12 P=0.5mm	
Object Dimention	1/2.5 type	-		Dimensions	Dimensions		φ 27mm x 26.02mm	
at M.O.D.	1/3 type	-		Weight	Weight		17.3g	
Coating		MgF2 Single Coat (All Surfaces λ = 510nm)						
Angle of View	D	1/2.5 type	-	1/3 type	-	1/4 type	180.0°	
(Peripheral light	Н	Fisheye	_		180.0°		163.2°	
amount 50%)	٧		180.0°		163.2°		130.2°	

## **Dimensions**

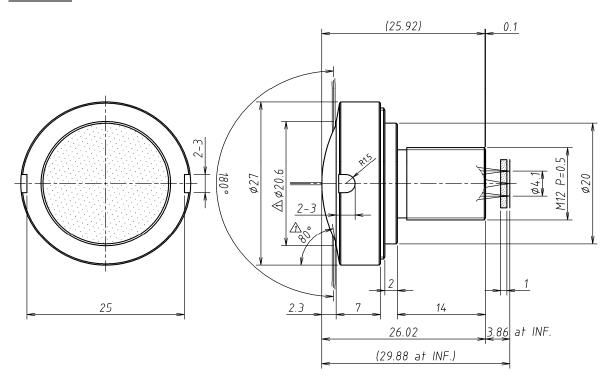

ImmerVision Enables Compatible.

Specification is subject to change without any notice.