


LDM700 Series DRIVER

Replaces LDM series driver

- Compact Size
- Current Regulating
- 24VDC
- DIN Rail Mount
- PNP/NPN Strobe or Continuous Mode

ELECTRICAL:

Input Voltage:24 VDC -0.5 / +4VInput Current:1 Amp MaxConnection:Screw terminals

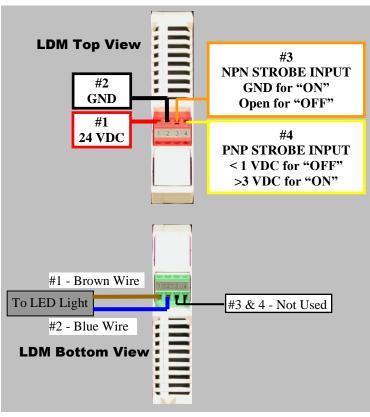





LDM700 is compatible with the following lights:

LL111.5, LL26 – All Colors RL3.5, RL5.5, RL8.5 – All Colors DL7.25 – All Colors MLL22 – All Colors

NOTE: Jumper 24VDC to PNP Strobe Input <u>or</u> GND to NPN Strobe input for light to remain in constant "ON" state.

Strobe is Pulse Width Duration – Light will remain "on" for duration of signal or pulse.

Note: White, Black and Green wires are not used on LDM700 Driver

Warning!!!



945 East 11th Avenue Tampa, FL 33605

Phone: (813) 984-0125

Contact: Sales@ pyramidimaging.com

Pyramid Imaging

https://pyramidimaging.com