


VLDM2800 Series DRIVER

Replaces VLDM4 series driver


- Variable Intensity Control ~10% to 100%
- Compact Size
- Current Regulating
- 24VDC
- DIN Rail Mount
- PNP/NPN Strobe or Continuous Mode

ELECTRICAL:

Input Voltage:24 VDC -0.5 / +4VInput Current:3 AmpConnection:Screw terminals

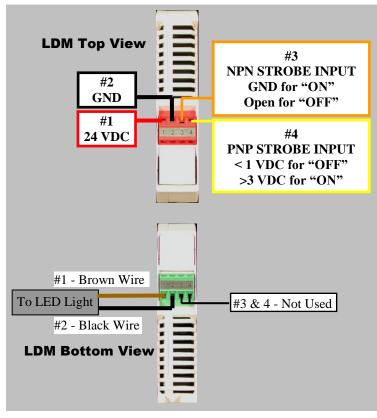





VLDM2800 is compatible with the following lights:

LL146 – All Colors LL157.5 – All Colors DL29.25 – All Colors RL30.5 – All Colors

NOTE: Jumper 24VDC to PNP Strobe Input <u>or</u> GND to NPN Strobe input for light to remain in constant "ON" state.

Strobe is Pulse Width Duration – Light will remain "on" for duration of signal or pulse.

Note: Blue, Green and White wires are not used on VLDM2800 Driver

Warning!!!



945 East 11th Avenue Tampa, FL 33605

Phone: (813) 984-0125

Contact: Sales@ pyramidimaging.com

Pyramid Imaging

https://pyramidimaging.com