

VLDM 350/2 Series DRIVER

Replaces VLDM350 series driver




- Variable Intensity Control ~10% to 100%
- Compact Size
- Current Regulating
- 24VDC
- DIN Rail Mount
- PNP/NPN Strobe or Continuous Mode

ELECTRICAL:

Input Voltage: 24 VDC -0.5 / +4V

Input Current: .5 Amps

Connection: Screw terminals

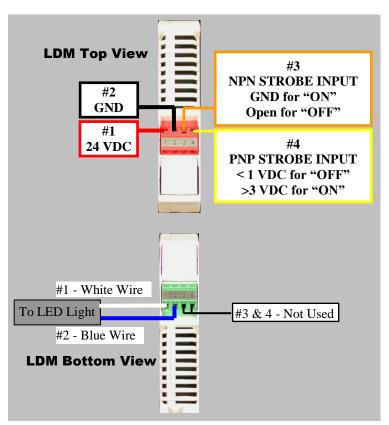



VLDM350/2 is compatible with the following lights:

LL16 – 850 (IR) MLL12 – All Colors SP3.25 – 850 (IR) MLL14 – All Colors RL2.5 – All Colors DA2 – All Colors

NOTE:

Jumper 24VDC to PNP Strobe Input or GND to NPN Strobe input for light to remain in constant "ON" state.

Strobe is Pulse Width Duration – Light will remain "on" for duration of signal or pulse.

Note: Brown, Black and Green wires are not used on VLDM350/2 Driver

Warning!!!

USE ONLY SPECTRUM ILLUMINATION LDM DRIVER WITH MONSTER LIGHTS.

DO NOT CONNECT MONSTER LIGHTS DIRECTLY TO 24VDC!



945 East 11th Avenue Tampa, FL 33605

Phone: (813) 984-0125

Contact: Sales@ pyramidimaging.com

https://pyramidimaging.com

Rev. Date: 2009-05-22