



Coaxial Lights


Coaxial lights are used for reflecting objects which requires a very even light over the whole area.

The light is covered by a coated protective glass.


Mounting: four M4 screws suited for LATAB brackets.



Mechanical Dimensions



Different hole pattern for SAX9 0110 and SAX9 0145 (8 instead of 4 thread holes). Drawing on request.

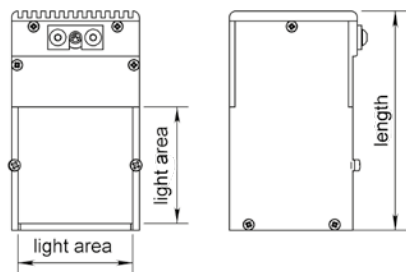

Step files available on request

Color Information

Replace "X" in order number by one character ¹	Color	Wavelength (nm)
H	Red	617
W	White	
R	IR	880
B	Blue	465
G	Green	520
U	UV	395

¹ Example for red coaxial light: SAH9 2525

Order Information

Order number	Side length of active light area (mm)	Width (mm)	Height (mm)	Length (mm)	Mounting hole distance (mm)	Controller ²	
						continuous/switching mode	strobe mode
SAX9 2525	25	30.5	33	70	10	1 A	8 A
SAX9 5050	50	55.5	58	95	16	1 A	8 A
SAX9 7575	75	80.5	84	120	16	1 A 3 A ³	8 A 24 A ³
SAX9 0110	109	117	118	159	16	3 A	24 A
SAX9 0145	145	150	153	190	16	3 A ⁴	24 A ⁴

Order Information RGB Lights

Order number	Side length of active light area (mm)	Width (mm)	Height (mm)	Length (mm)	Mounting hole distance (mm)	Controller ⁵	
						continuous/switching mode	strobe mode
RGB9 2525	25	30.5	33	70	10	1 A	8 A
RGB9 5050	50	55.5	58	95	16	1 A	8 A
RGB9 7575	75	80.5	84	120	16	1 A	8 A
RGB9 0110	109	117	118	159	16	1 A	8 A
RGB9 0145	145	150	153	190	16	1 A	8 A

² See "Controller selection" for details

³ For light colors white, blue, green and UV

⁴ For light colors red and IR, others on request

⁵ For RGB lights 4 channel controllers are required

Options

- Cable length and type see "Order options"
- Bracket options see "Lighting head brackets"