



945 East 11th Avenue Tampa, FL 33605 sales@pyramidimaging.com www.pyramidimaging.com 813-786-3785



ALDM350/1 Series DRIVER

Replaces ALDM SP1.25 series driver


- 0-10VDC Analog Control for intensity ~10% to 100%
- Current Regulating
- 24VDC
- DIN Rail Mount
- PNP/NPN Strobe or Continuous Mode

ELECTRICAL:

Input Voltage: 24 VDC -0.5 / +4V

Input Current: 0.5 Amp

Connection: Screw terminals

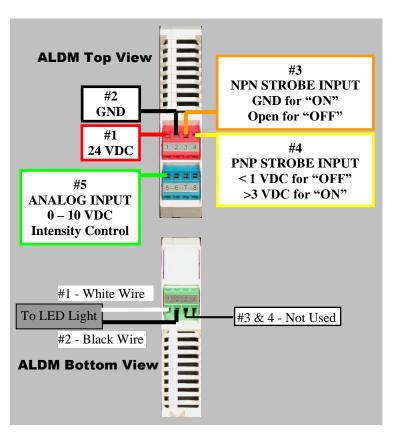



ALDM350/1 is compatible with the following lights:

SP1.25 – All Colors

NOTE:

Jumper 24VDC to PNP Strobe Input or GND to NPN Strobe input for light to remain in constant "ON" state.

Strobe is Pulse Width Duration – Light will remain "on" for duration of signal or pulse.

Note: 24V power supply return and GND reference for 0-10V input must be connected to pin #2 (GND) of red connector.

Note: Brown, Blue and Green wires are not used on ALDM350/1 Driver

Rev. Date: 2009-05-21


Warning!!!

USE ONLY SPECTRUM ILLUMINATION LDM DRIVER WITH MONSTER LIGHTS.


DO NOT CONNECT MONSTER LIGHTS DIRECTLY TO 24VDC!

Spectrum Illumination • 5114 Industrial Park Rd. • Montague, MI 49437 Phone 231-894-4590 Fax 231-894-4582

Analog Voltage vs. Light Drive Current

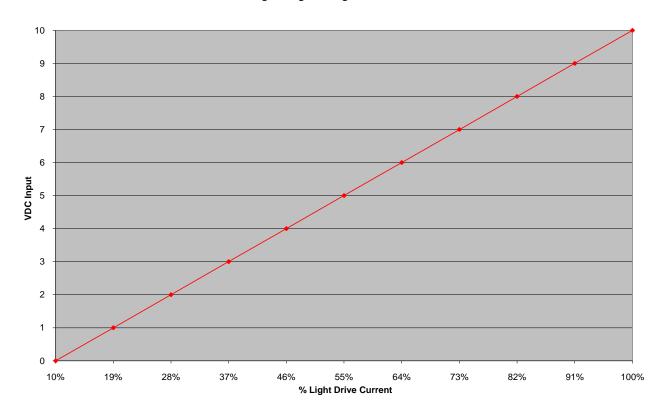

Wiring Block Diagram

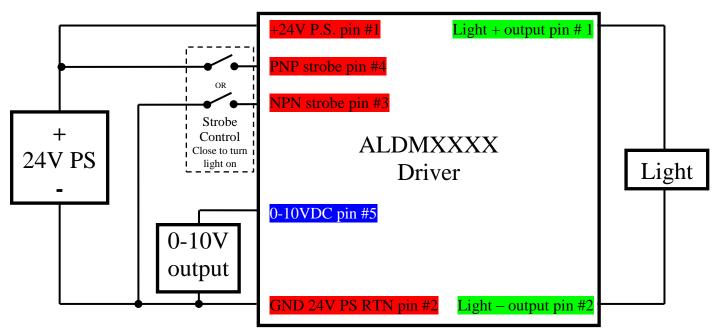

Spectrum Illumination • 5114 Industrial Park Rd. • Montague, MI 49437 Phone 231-894-4590 Fax 231-894-4582

www.spectrumillumination.com

Rev. Date: 2009-05-21