



945 East 11th Avenue Tampa, FL 33605


Phone: (813) 984-0125

Contact: Sales@pyramidimaging.com

<https://pyramidimaging.com>

6 PIN CONNECTOR (MOTOR)

- PIN 1 = +5Vdc
- PIN 2 = MOTOR CHAN A
- PIN 3 = MOTOR CHAN B
- PIN 4 = COMMON
- PIN 5 = MOTOR +
- PIN 6 = MOTOR -

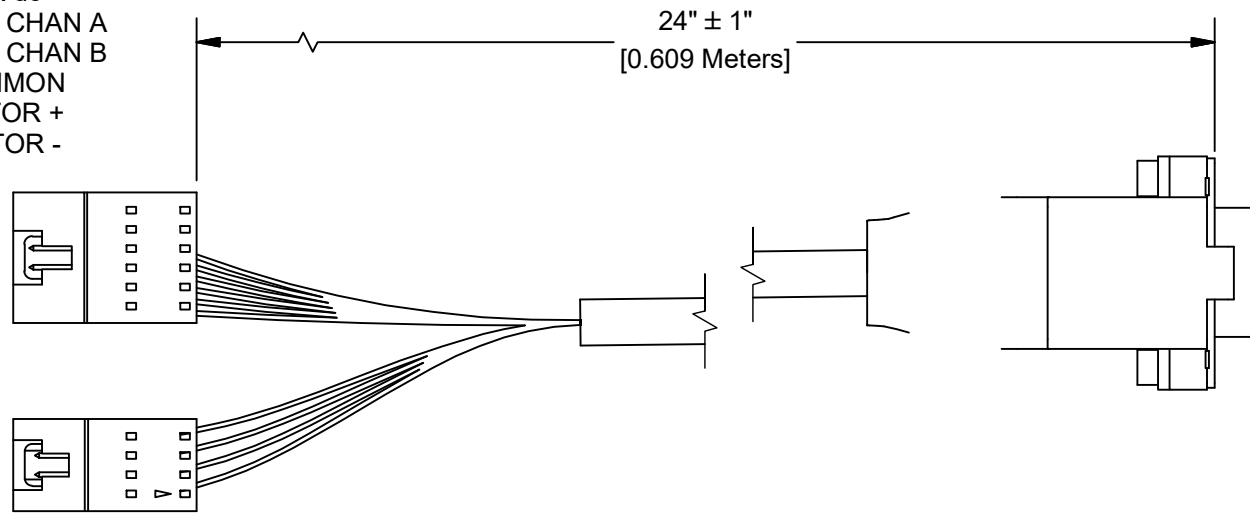

CONNECTOR PINOUT

- PIN 1 = MOTOR CHAN B
- PIN 2 = FAR LIMIT
- PIN 4 = +5Vdc
- PIN 5 = MOTOR -
- PIN 6 = MOTOR CHAN A
- PIN 7 = NEAR LIMIT
- PIN 8 = COMMON
- PIN 9 = MOTOR +

4 PIN CONNECTOR (SENSOR)

- PIN 1 = COMMON
- PIN 2 = FAR LIMIT
- PIN 3 = +5Vdc
- PIN 4 = NEAR LIMIT

OUTLINE

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		PROPRIETARY AND CONFIDENTIAL				
SCALE: 1:1		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NAVITAR. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NAVITAR IS PROHIBITED.				
WEIGHT:	9.23 g	0.0 inch 1.0 		CABLE HARNESS, ENC MTR D-SUB, 24"		
DR BY:	K. Arnold					
CH BY:	R. PODLENA					
PROJECT #:	E3496	Tolerance = +/- 1"		SIZE	PART NUMBER	REV
DATE DR:	4/20/2017			A	1-40286	A