


**Pyramid Imaging**

945 East 11th Avenue Tampa, FL 33605  
 sales@pyramidimaging.com  
 www.pyramidimaging.com  
 813-786-3785

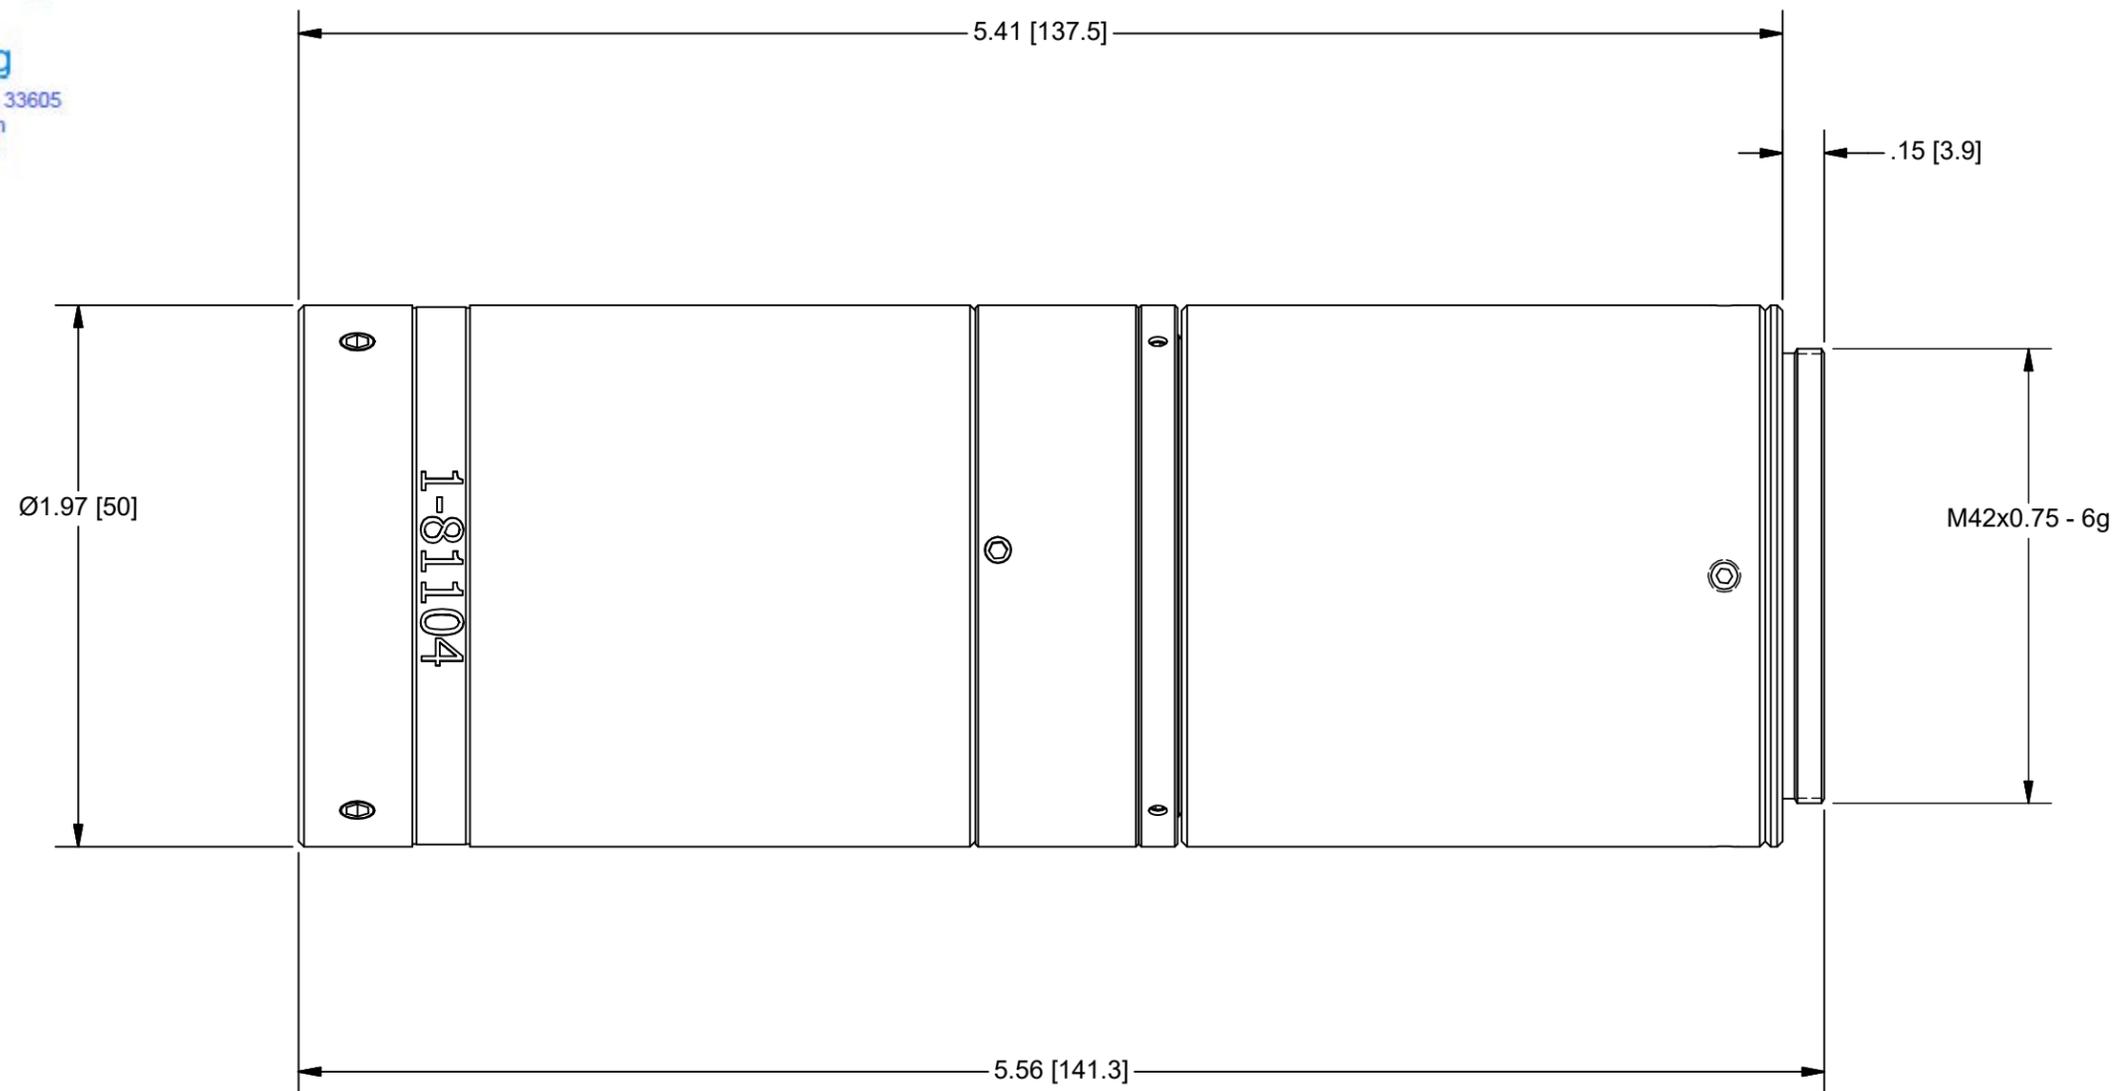

**2X REAR ADAPTER FOR RESOLV4K**

FOCAL LENGTH: 320.0mm  
 SENSOR COVERAGE: 32mm (APS FORMAT)  
 DISTORTION: 0.17%  
 INPUT ANGLE: 2.863°  
 MAX PUPIL Ø: 16.5mm (19.0mm RESOLV4K FIXED CONFIG)  
 IMG NA: 0.0258  
 WAVELENGTH: 430 - 670nm VIS  
 430 - 1000nm VNIR  
 900 - 1700nm SWIR  
 TRANSMISSION: 95.2% (445-655nm VIS)

**OUTLINE**

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		<b>PROPRIETARY AND CONFIDENTIAL</b> THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NAVITAR. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NAVITAR IS PROHIBITED.			
SCALE:	1.5:1			2X, (32mm APS) REAR ADAPTER	
WEIGHT:	1.04 lbmass	DO NOT SCALE DRAWING		SIZE	PART NUMBER
DR BY:	J. WILLIAMSON			<b>B</b>	<b>1-81104</b>
CH BY:	PB			REV	<b>A</b>
PROJECT #:	E3527				
DATE DR:	7/12/2017				