




WIRE ASSIGNMENTS	
PIN	FUNCTION
1	MAX. CONTROL CURRENT +
2	MAX. CONTROL CURRENT -
3	GND
4	POWER
5	I ² C SCL
6	I ² C SDA



MALE
OPTOTUNE SIDE

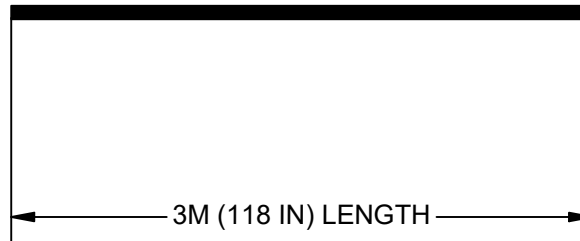





FEMALE
LENS DRIVER SIDE

OUTLINE



Pyramid Imaging

945 East 11th Avenue Tampa, FL 33605
 sales@pyramidimaging.com
 www.pyramidimaging.com
 813-786-3785

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		PROPRIETARY AND CONFIDENTIAL		 NAVITAR ROCHESTER, NEW YORK		
SCALE: 1:1		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NAVITAR. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NAVITAR IS PROHIBITED.				
WEIGHT: 0.00 lbmass		0.0 inch 1.0 		HIROSE CABLE, 6 PIN, M/F, 3M		
DR BY: JD		0.0 mm 25.0 				
CH BY: DEROSA		DO NOT SCALE DRAWING		SIZE	PART NUMBER	REV
PROJECT #: E3640				A	1-40371	A
DATE DR: 8/26/2019						