

**PK523PA-T20 ORIENTAL
5-PHASE MOTOR PINOUT**

PIN 3= +5Vdc
 PIN 4= MOTOR 4
 PIN 5= MOTOR 2
 PIN 8= FAR LIMIT
 PIN 10= MOTOR 3
 PIN 12= NEAR LIMIT
 PIN 13= COMMON
 PIN 14= MOTOR 5
 PIN 15= MOTOR 1

15 PIN HD FEMALE D-SUB

P6
 3 PIN I/O SWITCH
 OEM EXT POWER
 AMP#640440-3

24Vdc @ 1.5A
 PIN 1: +24Vdc SWITCHED INPUT
 PIN 2: COMMON
 PIN 3: +24Vdc POWER I/O SWITCH

P3
 LED 3

P2
 LED 1

P5
 POWER ON LED
 AMP #640442-2
 PIN 1= + (ANODE)
 PIN 2= - (CATHODE)


J5
 EXT POWER
 24Vdc @ 1.5A
 ø2.1mm CENTER POST (+)
 ø5.5mm CASE (-)

J1
 RS-232C
 SERIAL PORT

J2
 USB PORT
 TYPE B

J4
 AXIS B
 (FOCUS)

J3
 AXIS A
 (ZOOM)

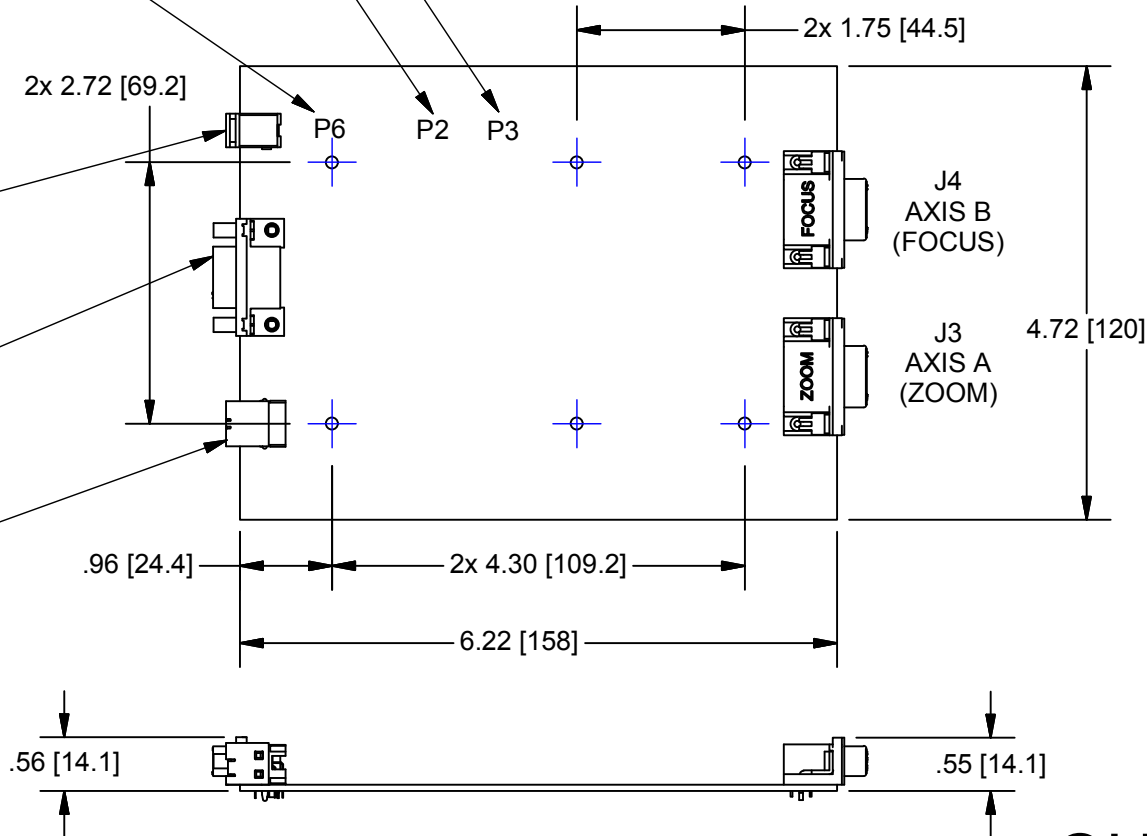

OUTLINE



Pyramid Imaging

945 East 11th Avenue Tampa, FL 33605
 sales@pyramidimaging.com
 www.pyramidimaging.com
 813-786-3785

UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE IN INCHES [MM]
 AND INCLUDE CHEMICALLY
 APPLIED OR PLATED FINISHES

SCALE: 1:2

WEIGHT: N/A

DR BY: C Boggio


CH BY: R. PODLENA

PROJECT #: E3036


DATE DR: 10/16/2013

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
 DRAWING IS THE SOLE PROPERTY OF
 NAVITAR. ANY REPRODUCTION IN PART
 OR AS A WHOLE WITHOUT THE WRITTEN
 PERMISSION OF NAVITAR IS PROHIBITED.



DO NOT SCALE DRAWING



KIT, PCB ASSEMBLY, 5 PHASE

SIZE
A

1-40167
 SHEET 2 OF 2

REV
A