


## FLIR A50/A70

### Compact Thermal Image Streaming Camera

FLIR A50 and A70 Thermal Image Streaming cameras are the right choice for users who want camera control capabilities and image streaming over Ethernet, as well as flexibility to perform analytics and raw data collection on thermal characteristics using preferred software applications. Thermal image and data output can easily be integrated into custom solutions with the GigE Vision and GenICam support. With options for Wi-Fi, an integrated visual camera, compressed radiometric image streaming, and ONVIF S compatibility, these small and lightweight fixed-focus automation cameras will optimize process control and quality assurance to improve yield, product quality, through-put time, and lower costs.

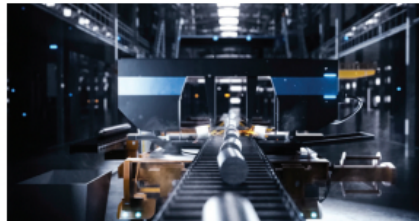

#### IMPROVE PRODUCTION AND QUALITY

Quickly access thermal characteristics during production or QA processes to optimize production settings and product quality

- Accurately measure temperatures with up to 640 × 480 (307,200 pixels) thermal resolution and ±2°C accuracy
- Reveal thermal detail with low-noise imagery and data
- Extract temperatures from each pixel without need for calculation using temperature linear mode and monochrome 16-bit image streaming
- Identify targets easier using optional simultaneous thermal and visible image streaming from a single camera with MSX®

#### TROUBLE-FREE INTEGRATION

Simplify integration efforts with non-proprietary industry standard connectivity, data and image streaming, and camera control

- GigE Vision and GenICam compliant for camera control and thermal/visual image video streaming into third-party machine vision applications
- Full support for compressed radiometric streaming using FLIR Atlas SDK (Advanced Configuration only)
- SNMP trap and advanced firewall protection allows multiple network devices to securely operate together
- Simple configuration via standard web browser

#### RUGGED, COMPACT, EASY INSTALLATION

Meet the demands of industrial environments and installations

- Built with an IP66 rating to withstand harsh environmental conditions
- Ensure operation in dynamic settings thanks to heavy-duty M8/12 connectors
- Easily install the compact, lightweight camera in any location, with multiple mounting options

For more information visit:  
[www.flir.com/A50-A70-image-streaming](http://www.flir.com/A50-A70-image-streaming)

[www.teledyneflir.com](http://www.teledyneflir.com)

Imagery for illustration purposes only. Specifications are subject to change without notice. ©2022 Teledyne FLIR LLC. All rights reserved.  
01/06/2022 REV1

## FLIR A50/A70

Image & Optical Data	Standard Configuration	Advanced Configuration	Video streaming, GVSP (GigE Vision Streaming Protocol)	
IR resolution	464 × 348 (A50), 640 × 480 (A70)		Unicast	Yes
Visual Resolution	1280 × 960 pixels (optional)		Multicast	Yes
Thermal Resolution	A70: 29°: <45 mK, 51°: <45 mK, 95°: <60 mK A50: 29°: <35 mK, 51°: <35 mK, 95°: <45 mK		Dual Video Streams	No (either IR, Visual, MSX, FSX or Radiometric 16 bit)
Focus	Fixed, adjustable with included focus tool		Visual Resolution	640 × 480
Spatial Resolution (IFOV)	A50: 29°: 1.2 mrad/pixel, 51°: 2.1 mrad/pixel, 95°: 4.0 mrad/pixel A70: 29°: 0.84 mrad/pixel, 51°: 1.5 mrad/pixel, 95°: 2.9 mrad/pixel		Pixel Formats	YUV411, MONO8, MONO16
FOV Options	29°, 51°, 95°		Radiometric Resolution	A50: 464 × 348, A70: 640 × 480
Detector Pitch	A50: 17 μm, A70: 12 μm		Temperature Linear 16-bit	Yes
Spectral Range	7.5–14.0 μm		Compressed JPEG-LS	No   Yes
Frame Rate	30 Hz		<b>Ethernet</b>	
<b>Measurement</b>			Ethernet Communication	GigE Vision, GenICam (SFNC 2.4)
Object temperature range	A50: -20°C to 175°C (-4°F to 347°F) 175°C to 1000°C (347°F to 1832°F)  A70: -20°C to 175°C (-4°F to 347°F) -20°C to 250°C (-4°F to 482°F) 175°C to 1000°C (347°F to 1832°F)		Connector Types	M12 8-pin X-coded, female; RP-SMA, female
Accuracy	±2°C (±3.6°F) or ±2% of reading, for ambient temperature 15°C to 35°C (59°F to 95°F) and object temperature above 0°C (32°F)		Ethernet Interface	Wired, Wi-Fi (optional)
Video Streaming, RTSP Protocol	Standard Configuration	Advanced Configuration	Ethernet Power	Power over Ethernet, PoE IEEE 802.3af class 3
Unicast	Yes		Ethernet Protocols	IEEE 1588, SNMP, TCP, UDP, SNTP, RTSP, RTP, HTTP, ICMP, IGMP, sftp (server), FTP (client), SMTP, DHCP, MDNS (Bonjour), uPnP
Multicast	Yes		Ethernet Standard	IEEE 802.3
Radiometric RTSP	No	Compressed JPEG-LS (FLIR Radiometric)	Ethernet Type	1000 Mbps
Multiple Image Streams	Yes, visual camera option needed (P/N T300295)		<b>Digital Input/Output</b>	
<b>Video Stream 0</b>			Connector Type	M12 Male 12-pin A-coded (shared with external power)
Streaming Resolution	640 × 480 pixels		Digital Input	2× opto-isolated, Vin (low) = 0 to 1.5 V, Vin (high) = 3 to 25 V
Source	Visual / IR / MSX® / FSX® (visual camera is optional)		Digital Output	3× opto-isolated, 0 to 48 V DC, max. 350 mA (derated to 200 mA at 60°C). Solid-state opto relay, 1× dedicated as fault output (NC)
Contrast Enhancement	FSX® / Histogram equalization (IR only)		<b>Power</b>	
Overlay	With/Without		Power Consumption	7.5 W at 24 V DC typical, 7.8 W at 48 V DC typical, 8.1 W at 48 V PoE typical
Encoding	H.264, MPEG4, or MJPEG		External Power Operation	24/48 V DC 8 W max
<b>Video Stream 1</b>			External Voltage	Allowed range 18 V to 56 V DC
Streaming Resolution	1280 × 960 pixels		Power Connection	M12 12-pin A-coded, male (shared with Digital I/O)
Source	Visual (visual camera is optional)		<b>Wi-Fi</b>	
Overlay	No		Connector Type	Female RP-SMA
Encoding	H.264, MPEG4, or MJPEG			

For a complete list of specifications, go to [flir.com/A50-A70-image-streaming](http://flir.com/A50-A70-image-streaming)

**WILSONVILLE**  
27700 SW Parkway Ave.  
Wilsonville, OR 97070  
USA  
PH: +1 866.477.3687

**NASHUA**  
9 Townsend West  
Nashua, NH 03063  
USA  
PH: +1 866.477.3687

**LATIN AMERICA**  
Av. Antonio Bardella, 320  
Sorocaba, SP 18085-852  
Brasil  
PH: +55 15 3238 8070

**CANADA**  
3430 South Service Road, Suite 103  
Burlington, ON L7N 3J5  
Canada  
PH: +1 800.613.0507

For more information visit:  
[www.flir.com/A50-A70-image-streaming](http://www.flir.com/A50-A70-image-streaming)

[www.teledyneflir.com](http://www.teledyneflir.com)

Imagery for illustration purposes only. Specifications are subject to change without notice. ©2022 Teledyne FLIR LLC. All rights reserved.  
01/06/2022 REV1