


# pco.edge 4.2

cooled sCMOS cameras

lightsheet scanning mode

CLHS FOL  
USB 3.0

small  
form factor

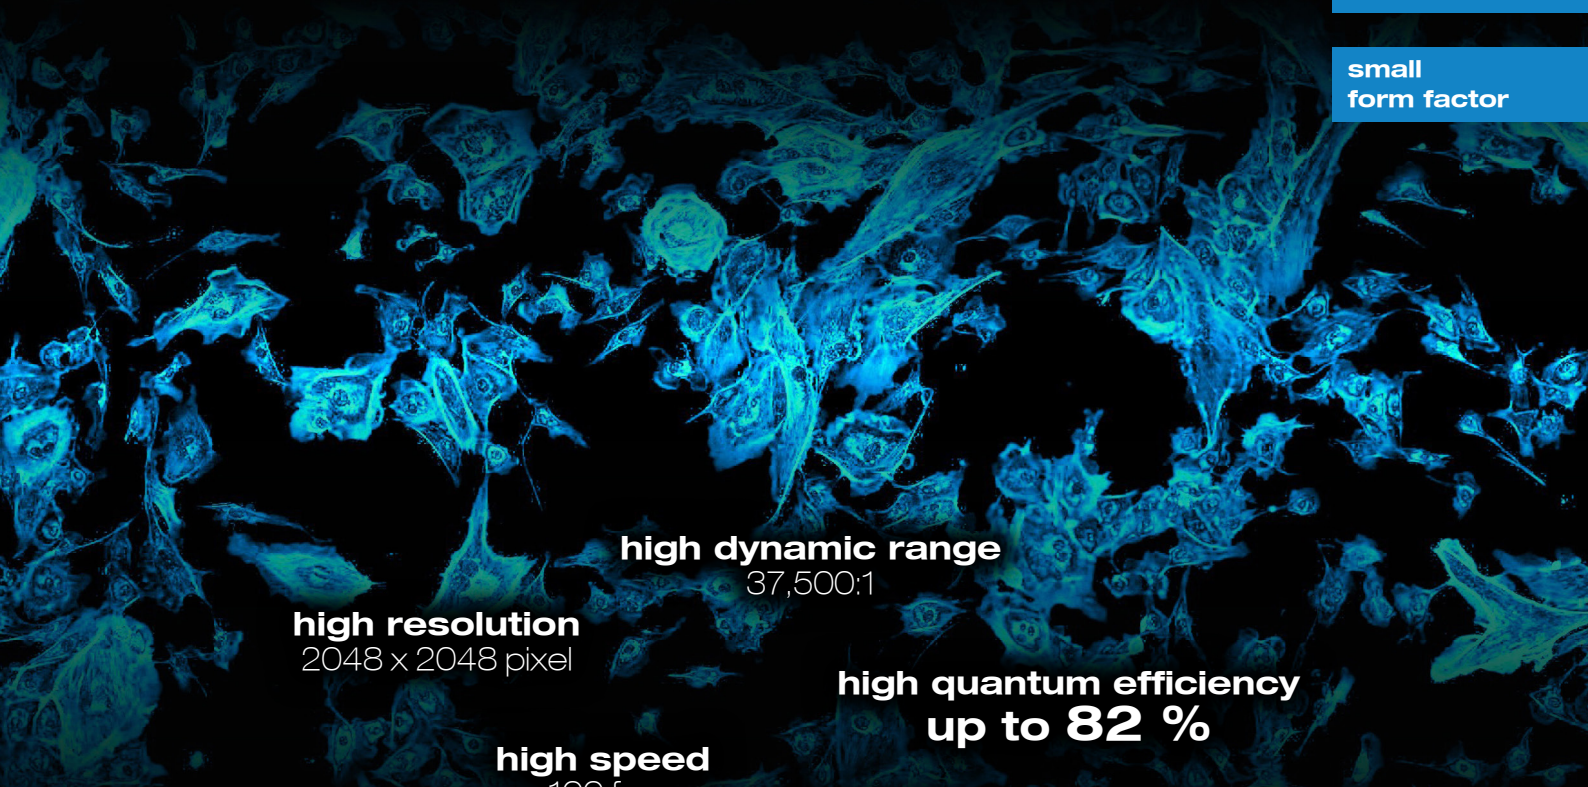

high dynamic range  
37,500:1

high resolution  
2048 x 2048 pixel

high quantum efficiency  
up to 82 %

high speed  
100 fps

low noise  
0.8 electrons



1288   
EMVA Standard Compliant

# pco.

An Excelitas Technologies Brand

» sCMOS image sensor

interfaces »	CLHS FOL	USB 3.0
type of sensor	scientific CMOS (sCMOS) monochrome	
resolution (h x v)	2048 x 2048 active pixels	
pixel size (h x v)	6.5 µm x 6.5 µm	
sensor format/diagonal	13.3 mm x 13.3 mm / 18.8 mm	
shutter mode	rolling shutter (RS) with selectable readout modes	rolling shutter (RS) with selectable readout modes global reset - rolling readout (GR)
MTF	76.9 lp/mm (theoretical)	
fullwell capacity	30,000 e <sup>-</sup>	
readout noise (typ.) <sup>1</sup>	0.8 <sub>med</sub> e <sup>-</sup> / 1.3 <sub>rms</sub> e <sup>-</sup> @ slow scan 0.9 <sub>med</sub> e <sup>-</sup> / 1.4 <sub>rms</sub> e <sup>-</sup> @ fast scan	0.8 <sub>med</sub> e <sup>-</sup> / 1.3 <sub>rms</sub> e <sup>-</sup>
dynamic range (typ.)	37,500:1 91.5 dB, slow scan	37,500:1 91.5 dB
quantum efficiency	up to 82 %	
spectral range	300 nm ... 1100 nm	
dark current (typ.)	< 0.6 e <sup>-</sup> /pixel/s @ 7 °C sensor temperature	< 0.3 e <sup>-</sup> /pixel/s @ 0 °C sensor temperature
DSNU	< 0.3 <sub>rms</sub> e <sup>-</sup>	< 0.3 <sub>rms</sub> e <sup>-</sup>
PRNU	< 0.3 %	< 0.2 %
anti blooming factor <sup>2</sup>	> 10,000	


» camera system

interfaces »	CLHS FOL	USB 3.0
maximum frame rate @ full resolution	100 fps	40 fps
exposure/shutter time	100 µs to 10 s (RS)	100 µs to 20 s (RS) 30 µs to 2 s (GR)
dynamic range A/D <sup>3</sup>	16 bit	
A/D conversion factor	0.46 e <sup>-</sup> /DN	
pixel scan rate	274.0 MHz fast scan 100.0 MHz slow scan	110.0 MHz
pixel data rate	548.0 MPixel/s fast scan 200.0 MPixel/s slow scan	220.0 MPixel/s
binning horizontal	x1, x2, x4	
binning vertical	x1, x2, x4	
region of interest (ROI)	horizontal: steps of 4 pixels vertical: steps of 1 pixel	horizontal: steps of 4 pixels vertical: steps of 1 pixel
non linearity	< 0.5 %	
cooling method	7 °C stabilized, selectable: peltier with forced air (fan) or water cooling (both up to 27 °C ambient)	0 °C stabilized, peltier with forced air (fan) or water cooling (both up to 27 °C ambient)
trigger input signals	frame trigger, sequence trigger, programmable input (SMA connectors)	
trigger output signals	exposure, busy, line, programmable output (SMA connectors)	
time stamp	in image (1 µs resolution)	

» general

interfaces »	CLHS FOL	USB 3.0
power delivery	24 VDC (+/- 10 %)	
power consumption	32 W max. (typ. 19 W @ 20 °C)	21 W max. (typ. 12 W @ 20 °C)
weight <sup>4</sup>	850 g air-cooled 1060 g water-cooled	800 g
operating temperature	+ 10 °C to + 40 °C	
operating humidity range	10 % to 80 % (non-condensing)	
storage temperature range	- 10 °C to + 60 °C	
optical interface	C-mount & F-mount	
lens remote controller	electronic control for Canon EF lenses only air-cooled camera	not available
maximum cable length	10 km	5 m
CE/FCC certified	yes	

» quantum efficiency

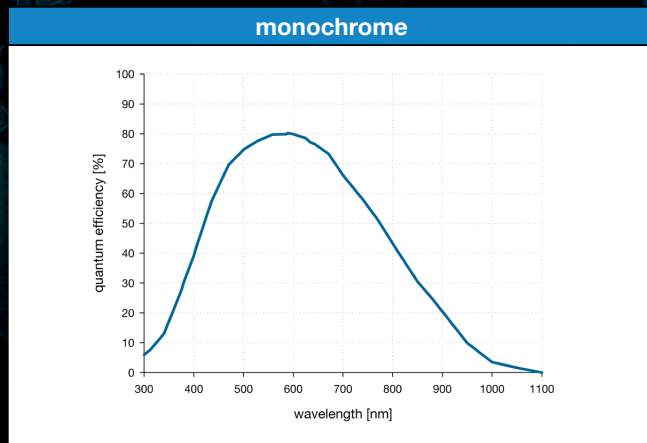

» frame rate table<sup>5</sup>




interfaces »	CLHS FOL	USB 3.0
typical examples	fast scan	slow scan
2048 x 2048	100 fps	35 fps
2048 x 1024	200 fps	70 fps
2048 x 512	400 fps	140 fps
2048 x 256	800 fps	281 fps
2048 x 128	1600 fps	562 fps
1920 x 1080	189 fps	66 fps
1600 x 1200	170 fps	60 fps
1280 x 1024	200 fps	70 fps
640 x 480	420 fps	150 fps
320 x 240	853 fps	300 fps

technical specifications




pco.edge 4.2

» dimensions

pco.edge CLHS FOL



pco.edge USB 3.0



F-mount and C-mount lens adapter are changeable. All dimensions are given in millimeter.

» camera rear view

CLHS FOL  
air-cooled



water-cooled



USB 3.0  
air-cooled/water-cooled



» lens remote controller

The optional Canon lens control adapter enables the user to connect electronic EF- and EF-S Canon lenses allowing to remote control focus and aperture of those lenses.



<sup>1</sup> The readout noise values are given as median (med) and root mean square (rms) values, due to the different noise models, which can be used for evaluation. All values are raw data without any filtering.  
<sup>2</sup> Based on image sensor data sheet.  
<sup>3</sup> The high dynamic signal is simultaneously converted at high and low gain by two 11 bit A/D converters and the two 11 bit values are sophisticatedly merged into one 16 bit value.  
<sup>4</sup> Measured with C-mount interface.  
<sup>5</sup> Max. fps with centered ROI.


technical specifications

pco.edge 4.2

» applications

bright-field microscopy | fluorescence microscopy | digital pathology | single molecule localization microscopy (SMLM) – PALM, STORM, dSTORM, GSDIM | lightsheet fluorescence microscopy (LSFM) | structured illumination microscopy (SIM) | calcium imaging | förster resonance energy transfer (FRET) | fluorescence recovery after photobleaching (FRAP) | high-speed bright-field ratio imaging | high throughput screening | high content screening | biochip reading | total internal reflection microscopy (TIRF) | spinning disk confocal microscopy | 3D metrology | ophthalmology | photovoltaic inspection | industrial quality inspection | wafer inspection | image intensifier imaging | lucky astronomy | particle tracking velocimetry (PTV)

» software

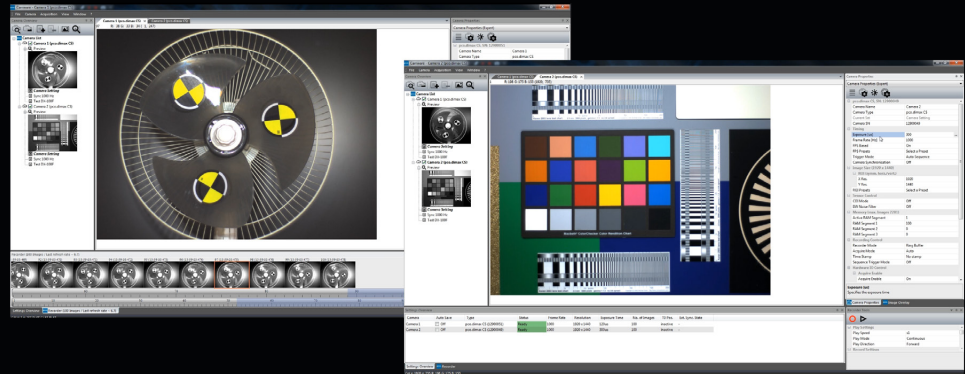

With pco.camware you control all camera settings, the image acquisition and the storage of your image data. The pco.sdk is the complementary software development kit. It includes dynamic link libraries for user customization and integration on Windows-PC platforms. Drivers for popular third party software packages are also available for you.

All this items like pco.camware, pco.sdk and third party drivers, are free-to-download at [www.pco.de](http://www.pco.de)

» third party integrations



945 East 11<sup>th</sup> Avenue Tampa, FL 33605  
Phone: (813) 984-0125  
Contact: Sales@pyramidimaging.com  
<https://pyramidimaging.com>

subject to changes without prior notice | lens is sold separately  
© Excelitas PCO GmbH, Kelheim | pco.edge 4.2 data sheet | v2.03

## contact

### pco europe

+49 9441 2005 50  
info@pco.de  
pco.de

### pco america

+1 866 678 4566  
info@pco-tech.com  
pco-tech.com

### pco asia

+65 6549 7054  
info@pco-imaging.com  
pco-imaging.com

### pco china

+86 512 67634643  
info@pco.cn  
pco.cn



for application stories  
please visit our website

# pco.

An Excelitas Technologies Brand