

MetaLight™ Linear Front Light

Model#: LFL601



- Shock and Vibration proof up to 10 G's per MIL-STD-910F the highest industry standards
- Solid one-piece machined aluminum housings and thermal potting
- Performance extends to rugged environments
- Can be configured for wavelength and other specifications
- Equipt with pairing and axial rotation capabilities

Part #	Color	Power Supply	Specifications:	
LFL601-W-24	White 5500K	24 volt power supply available upon request.	Current Consumption	.75A @ 24VDC
LFL601-R-24	Red 630nm		Housing	Aluminum
LFL601-B-24	Blue 455nm		Finish	Anodized
LFL601-G-24	Green 530nm		Intensity Uniformity	+/-5%
LFL601-IRN-24	Infrared 850nm		Illuminance	90,000 Lux
LFL601-IRL-24	Infrared 880nm		Operating Temperature	120° F Max
LFL601-UVL-24	UV 395nm		Compliance	CE/RoHS
LFL601-UVS-24	UV 365nm		Lifetime Hours	75,000 Hours


10 ft. flying leads come standard on all products.
Light features built-in constant current driver.
No expensive controller required.

Active Area	Dimensions
1 in x 25in 25.4mm x 635mm	26.56in x 1.13in x 1.25in 674mm x 28.58mm x 31.75mm

ORDERING INFORMATION:

• L F L 6 0 1 - - 2 4 -

W	White 5500k	*BLANK	10 ft. Flying Leads
R	Red 630nm	T	M12 Quick Disconnect
G	Green 530nm	ILD	In Line Dimmer
B	Blue 455 nm	ILS	In Line Strobe (customer provide trigger info)
IRL	Infrared 880nm		
UVL	(long) 395nm		
UVS	(short) 365nm		

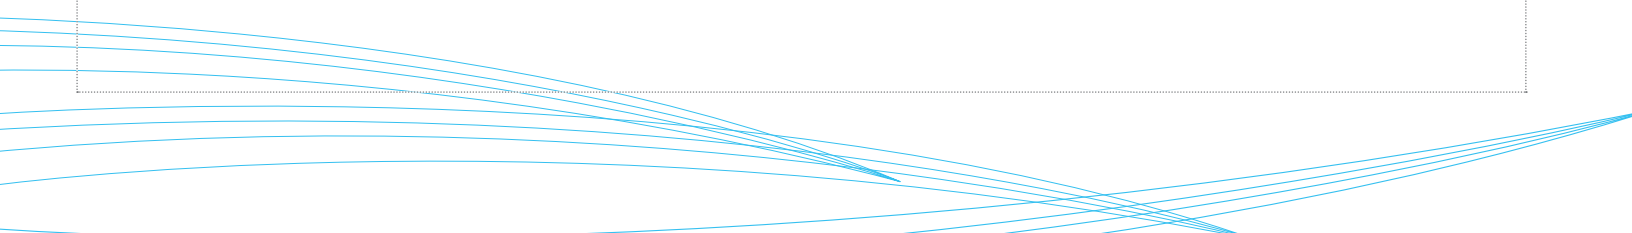


MetaLight™ Linear Front Light Model#: LFL601

Wiring Diagram

Flying Leads	Function
RED	+24VDC
BLACK	Ground
WHITE	+24VDC
GREEN	Ground

M12 Connector

PIN #	Function
1	+24VDC
2	0-10VDC Intensity Control
3	Ground
4	Signal Ground

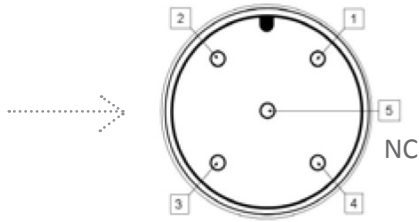

24 AWG 4 WIRES CABLE X 1

When not using intensity control, connect 0-10V control line to +24 (Max Intensity Control = 25V) and intensity control ground to ground

Drawing/Diagram

(4) CONDUCTOR ELECTRICAL CABLE, 22 AWG 10 FT LONG WITH FLYING LEADWIRE ENDS

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	B	REVISED AND REDRAWN, KW	8/16/2011	

Pyramid Imaging
945 East 11th Avenue Tampa, FL 33605
sales@pyramidimaging.com
www.pyramidimaging.com
813-786-3785

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	METAPHASE TECHNOLOGIES, INC.
DIMENSIONS ARE IN INCHES		KW	8-16-11	TITLE:
TOLERANCES:				FRONT LIGHT, LINEAR, 1 X 25 INCH
FRACTIONAL ±				SIZE DWG. NO.
ANGULAR: MATCH ± BEND ±				B LFL601
TWO PLACE DECIMAL ±				REV
THREE PLACE DECIMAL ±				B
INTERPRET GEOMETRIC TOLERANCING PER:				SCALE: NTS WEIGHT:
MATERIAL:				SHEET 1 OF 1
FINISH:				
NEXT ASSY	USED ON			
APPLICATION	DO NOT SCALE DRAWING			

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF METAPHASE TECHNOLOGIES, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF METAPHASE TECHNOLOGIES, INC. IS PROHIBITED.