## MetaLight<sup>TM</sup> Linear Front Light Model#: LFL1X4





# Pyramid Imaging

- Shock and Vibration proof up to 10 G's per MIL-STD-910F the highest industry standards
- Solid one-piece machined aluminum housings and thermal potting
- · Performance extends to rugged environments
- · Can be configured for wavelength and other specifications
- · Equipt with pairing and axial rotation capabilities

| Part #        | Color          | Power Supply                   | Specifications:       |               |
|---------------|----------------|--------------------------------|-----------------------|---------------|
| LFL1X4-W-24   | White 5500K    |                                | Current Consumption   | 0.12A         |
| LFL1X4-R-24   | Red 630nm      |                                | Housing               | Aluminum      |
| LFL1X4-B-24   | Blue 455nm     |                                | Finish                | Anodized      |
| LFL1X4-G-24   | Green 530nm    | 24 volt power supply available | Intensity Uniformity  | +/-5%         |
| LFL1X4-IRN-24 | Infrared 850nm | upon request.                  | Operating Temperature | 120° F Max    |
| LFL1X4-IRL-24 | Infrared 880nm |                                | Illuminance           | 75,000 Lux    |
| LFL1X4-UVL-24 | UV 395nm       |                                | Compliance            | CE/RoHS       |
| LFL1X4-UVS-24 | UV 365nm       |                                | Lifetime Hours        | 75,000 Hours  |
| 10 th fluit   |                |                                | Lifetime nouis        | 75,000 110013 |


10 ft. flying leads come standard on all products. Light features built-in constant current driver. No expensive controller required.

### Active Area

0..63in x 4 in 16mm x 104mm


#### Dimensions

4.33in x .86in x .86in 110mm x 22mm x 22mm

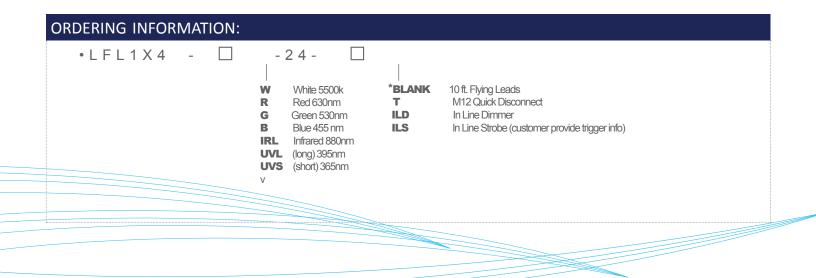

# MetaLight<sup>TM</sup> Linear Front Light Model#: LFL1X4

| M12 Connector |                              |  |  |  |
|---------------|------------------------------|--|--|--|
| PIN #         | Function                     |  |  |  |
| 1             | +24VDC                       |  |  |  |
| 2             | 0-10VDC<br>Intensity Control |  |  |  |
| 3             | Ground                       |  |  |  |
| 4             | Signal Ground                |  |  |  |



| Wiring Diagram  |          |  |  |  |
|-----------------|----------|--|--|--|
| Flying<br>Leads | Function |  |  |  |
| RED             | +24VDC   |  |  |  |
| BLACK           | Ground   |  |  |  |
| WHITE           | +24VDC   |  |  |  |
| GREEN           | Ground   |  |  |  |

Metaphase Technologies, Inc.

24 AWG 4 WIRES CABLE X 1

When not using intensity control, connect 0-10V control line to +24 (Max Intensity Control = 25V) and intensity control ground to ground

