

MetaLight™ Linear Front Light

Model#: LFL1X6



- Shock and Vibration proof up to 10 G's per MIL-STD-910F the highest industry standards
- Solid one-piece machined aluminum housings and thermal potting
- Performance extends to rugged environments
- Can be configured for wavelength and other specifications
- Equipt with pairing and axial rotation capabilities

Part #	Color	Power Supply	Specifications:	
LFL1X6-W-24	White 5500K	24 volt power supply available upon request.	Current Consumption	.15A
LFL1X6-R-24	Red 630nm		Housing	Aluminum
LFL1X6-B-24	Blue 455nm		Finish	Anodized
LFL1X6-G-24	Green 530nm		Intensity Uniformity	+/-5%
LFL1X6-IRN-24	Infrared 850nm		Operating Temperature	120° F Max
LFL1X6-IRL-24	Infrared 880nm		Illuminance	75,000 Lux
LFL1X6-UVL-24	UV 395nm		Compliance	CE/RoHS
LFL1X6-UVS-24	UV 365nm		Lifetime Hours	75,000 Hours

10 ft. flying leads come standard on all products.
Light features built-in constant current driver.
No expensive controller required.

Active Area	Dimensions
.63in x 6.41in 16mm x 162.7mm	6.6in x .86in 168.3mm x 22mm

ORDERING INFORMATION:

• L F L 1 X 6 - - 2 4 -

W White 5500k
R Red 630nm
G Green 530nm
B Blue 455 nm
IRL Infrared 880nm
UVL (long) 395nm
UVS (short) 365nm


***BLANK** 10 ft. Flying Leads
T M12 Quick Disconnect
ILD In Line Dimmer
ILS In Line Strobe (customer provide trigger info)

MetaLight™ Linear Front Light

Model#: LFL1X6

M12 Connector

PIN #	Function
1	+24VDC
2	0-10VDC Intensity Control
3	Ground
4	Signal Ground

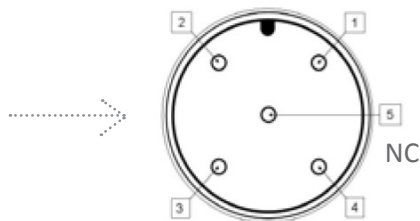

Wiring Diagram

Flying Leads	Function
RED	+24VDC
BLACK	Ground
WHITE	+24VDC
GREEN	Ground

24 AWG 4 WIRES CABLE X 1

When not using intensity control, connect 0-10V control line to +24 (Max Intensity Control = 25V) and intensity control ground to ground

Drawing/Diagram

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	REDRAWN IN SOLIDWORKS, KW	3/16/2012	

ELECTRICAL CABLE, 10 FT. LG (4) CONDUCTOR, 22 AWG WITH FLYING LEADWIRE ENDS.

M4X0.7 -6H X .25 (6.4) DP BOTTOM TAP (3) PLACES

<p>PROPRIETARY AND CONFIDENTIAL</p> <p>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF METAPHASE TECHNOLOGIES, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF METAPHASE TECHNOLOGIES, INC. IS PROHIBITED.</p>	<p>UNLESS OTHERWISE SPECIFIED:</p> <p>DIMENSIONS ARE IN INCHES</p> <p>TOLERANCES:</p> <p>FRACTIONAL ±1/64</p> <p>ANGULAR: MATCH 1/2° MIN 15°</p> <p>TWO PLACE DECIMAL ±.01</p> <p>THREE PLACE DECIMAL ±.005</p> <p>INTERPRET GEOMETRIC TOLERANCING PER:</p> <p>MATERIAL:</p>	<p>NAME: KW</p> <p>DATE: 3/16/2012</p> <p>DRAWN: KW</p> <p>CHECKED:</p> <p>ENG APPR:</p> <p>MFG APPR:</p> <p>G.A.:</p> <p>COMMENTS:</p>	<p>METAPHASE TECHNOLOGIES, INC.</p> <p>TITLE: FRONT LIGHT, LINEAR, .5 X 6 INCH</p> <p>SIZE: B DWG. NO. LFL1X6 REV: A</p> <p>SCALE: NTS WEIGHT: SHEET 1 OF 1</p>
	<p>APPLICATION: DO NOT SCALE DRAWING</p>	<p>FINISH:</p>	<p>NEXT ASSY:</p> <p>USED ON:</p>



Pyramid Imaging

945 East 11th Avenue Tampa, FL 33605
 sales@pyramidimaging.com
 www.pyramidimaging.com
 813-786-3785