


MetaLight™ Linear Front Light Model#: LFL1401

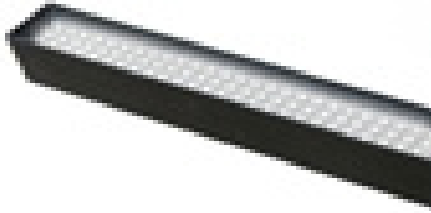

- Shock and Vibration proof up to 10 G's per MIL-STD-910F the highest industry standards
- Solid one-piece machined aluminum housings and thermal potting
- Performance extends to rugged environments
- Can be configured for wavelength and other specifications
- Equipt with pairing and axial rotation capabilities

Part #	Color	Power Supply	Specifications:	
LFL1401-W-24	White 5500K	24 volt power supply available upon request.	Current Consumption	1.8A @ 24VDC
LFL1401-R-24	Red 630nm		Housing	Aluminum
LFL1401-B-24	Blue 455nm		Finish	Anodized
LFL1401-G-24	Green 530nm		Intensity Uniformity	+/-5%
LFL1401-IRN-24	Infrared 850nm		Operating Temperature	120° F Max
LFL1401-IRL-24	Infrared 880nm		Illuminance	75,000 Lux
LFL1401-UVL-24	UV 395nm		Compliance	CE/RoHS
LFL1401-UVS-24	UV 365nm		Lifetime Hours	75,000 Hours

10 ft. flying leads come standard on all products.
Light features built-in constant current driver.
No expensive controller required.

Active Area	Dimensions
1 in x 65 in 25.4mm x 1651mm	66.81in x 1.13in x 1.25in 1696mm x 28.58mm x 31.75mm

ORDERING INFORMATION:

• L F L 1 4 0 1 - - 2 4 -

W White 5500k
R Red 630nm
G Green 530nm
B Blue 455 nm
IRL Infrared 880nm
UVL (long) 395nm
UVS (short) 365nm

***BLANK**
T
ILD
ILS


10 ft. Flying Leads
M12 Quick Disconnect
In Line Dimmer
In Line Strobe (customer provide trigger info)

MetaLight™ Linear Front Light

Model#: LFL1401

M12 Connector

PIN #	Function
1	+24VDC
2	0-10VDC Intensity Control
3	Ground
4	Signal Ground

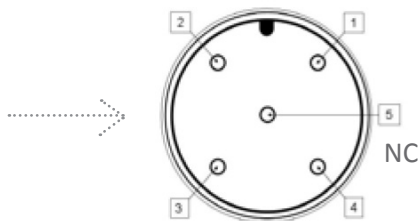

Wiring Diagram

Flying Leads	Function
RED	+24VDC
BLACK	Ground
WHITE	+24VDC
GREEN	Ground

24 AWG 4 WIRES CABLE X 1

When not using intensity control, connect 0-10V control line to +24 (Max Intensity Control = 25V) and intensity control ground to ground

Drawing/Diagram

ELECTRICAL CABLE (4) CONDUCTOR, 22 AWG 10 FT LONG WITH FLYING LEADWIRE ENDS.

#8-32 UNC X 5/16 DP (2) PLACES, BOTH SIDES (4) HOLES TOTAL

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	REVISED AND REDRAWN, KW	3/21/12	

Pyramid Imaging
 945 East 11th Avenue Tampa, FL 33605
 sales@pyramidimaging.com
 www.pyramidimaging.com
 813-786-3785

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF METAPHASE TECHNOLOGIES, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF METAPHASE TECHNOLOGIES, INC. IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:	NAME	DATE	METAPHASE TECHNOLOGIES, INC.
DIMENSIONS ARE IN INCHES	KW	3/21/2012	TITLE:
TOLERANCES: FRACTIONAL ±	CHECKED		FRONT LIGHT, LINEAR, 1 X 65 INCH
ANGULAR: MINUS ±	ENG APPR.		
BEND ±	MFG APPR.		
THREE PLACE DECIMAL ±	Q.A.		
INTERPRET GEOMETRIC TOLERANCING PER: MATERIAL	COMMENTS:		
FINISH			
APPLICATION	DO NOT SCALE DRAWING		

945 East 11th Avenue Tampa, FL 33605
 sales@pyramidimaging.com
 www.pyramidimaging.com
 813-786-3785

SIZE DWG. NO. REV
B LFL1401 **A**
 SCALE: NTS WEIGHT: SHEET 1 OF 1