



# Steady State Control, RS-232, 1 Ch, 1/3A

The steady state control units are designed to control all types of LATAB light heads.

This control unit is designed for "P&P" (plug and play). Just connect the LATAB light head and the controller automatically identifies the light type-with an electronic sensor.


Parameters like intensity will be controlled by a PC.

Supplied with 5 meter power/com cable.

Demo-Software available on [www.latab.se](http://www.latab.se)



## Mechanical dimensions

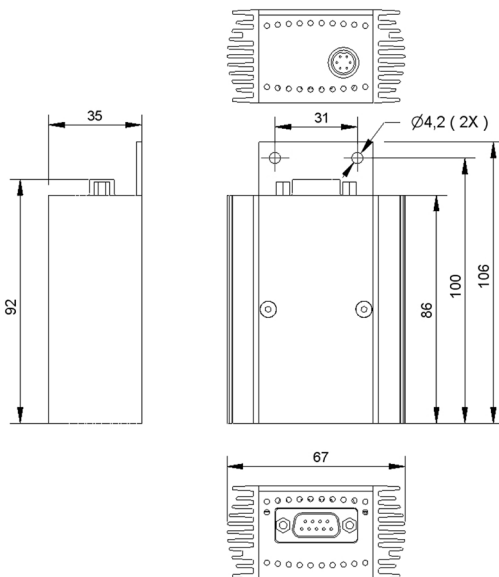

## Specifications

Supply voltage	24V DC $\pm$ 10%, max 1A/2.5A
Power output	Max. 1A /3A
Light intensity	0-100% via Interface
Operation temp.	0-65°C
Communication	RS-232

Housed in black aluminium box.  
CE approved and RoHS compliant.

## Ordering information

Controller	Model
Steady state control, RS-232, 1 Ch, 1A	PAD2 1136/1
Steady state control, RS-232, 1 Ch, 3A	PAD2 1136/3

## Option

DIN clips add "/D"



Pyramid Imaging, Inc.  
945 East 11<sup>th</sup> Avenue  
Tampa, FL 33605  
[www.pyramidimaging.com](http://www.pyramidimaging.com)  
[sales@pyramidimaging.com](mailto:sales@pyramidimaging.com)  
+1 813 984 0125