

Low Profile Right Angle Feed Thru Internal Assembly - CLFP*-xx-R

Product Outline

These overmolded low profile assemblies have been designed and tested for internal camera to panel use.


The unique 'feed thru' assembly design reduces the space needed behind the camera for mounting in tight spaces or inside cabinets. The standard 8 inch cable length is available from stock and is perfect for most applications. Stainless steel thumbscrews ensure positive retention between the connector and the camera.



Main Product Specifications

Features

- Lowest profile right angle Camera Link available
- Overmolded plug interface
- Pliable ribbon style for flexibility
- Receptacle jacknuts for easy mounting
- RoHS Compliant

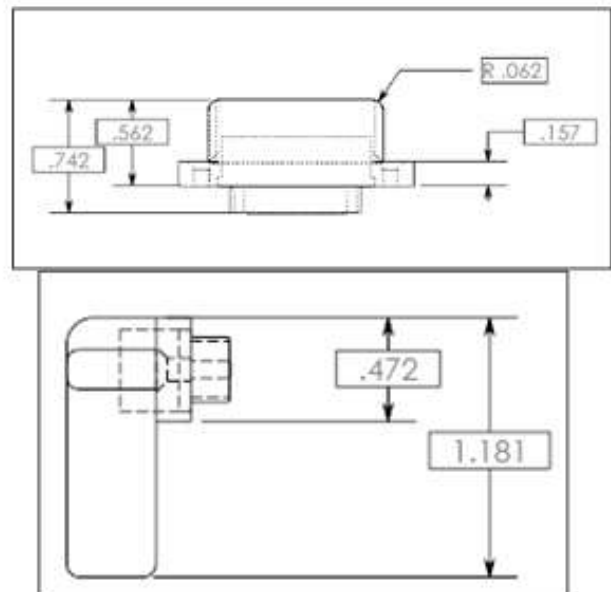

Primary Components

Cable	Shielded Ribbon
Connector A	26 Pos MDR Plug
Connector B	26 Pos MDR Receptacle

Ordering Information

Order Number	Length		Description
	Meters	Feet	
CLFPU-0.2-R	0.2	0.66	CL Feed Thru RA Up
CLFPD-0.2-R	0.2	0.66	CL Feed Thru RA Down
CLFPU-0.2-RE	0.2	0.66	CL Feed Thru RA Up w/Epoxy
CLFPD-0.2-RE	0.2	0.66	CL Feed Thru RA Down w/Epoxy

Custom variations available. Please [contact customer service](#) for additional information.