


## MCLCP\*-xx-P & MCLCP\*-xx-MP

### Product Outline

Mini Camera Link offers a smaller interface without sacrificing the performance and quality that Intercon 1 brings to Camera Link products.

This assembly offers a unique right angle overmold that provides durable functionality in tight space constrictions. The overmold also features thumbscrew interlocking for dependable mating even through motion and vibration.

Because both standard and Mini Camera Link interface with the same pin configuration, cables are available that convert Mini to Standard. This enables the use of a Camera Link system that fits your specific needs. Both Mini and Standard Camera Link products are available with right angles

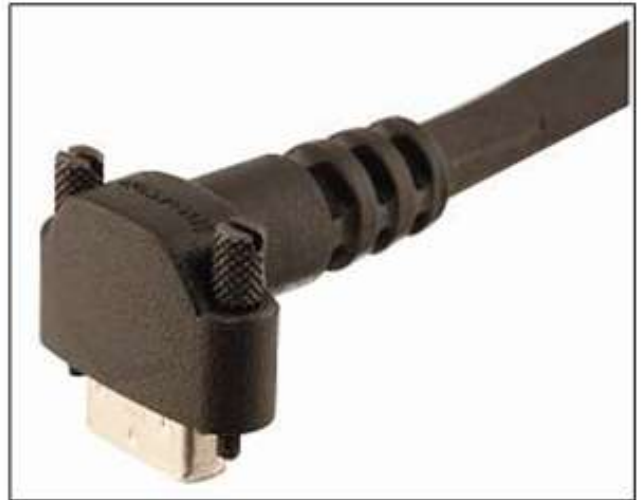

### Main Product Specifications

#### Features

- 1 million + flex life design
- Overmolded connectors
- Robust jacket capable of outdoor use
- Thumbscrew locking
- 360 degree shielding
- RoHS Compliant



Cable Specifications	
Overall Diameter	.270 Inches
Max Temperature	80 Degrees C
Jacket Color	Black
UL/CSA Rated	Yes
Min. Bend Radius	2.70 Inches
Flame Rating	vw-1 / FT-1

Primary Components	
Cable	11 Individually Shielded Twisted Pairs
Connector A	26 Pos SDR (HDR)
Connector B	26 Pos MDR or SDR (HDR)

### Ordering Information

Order Number	Description
MCLCP*-xx-P	Mini CL to Standard CL High Flex
MCLCP*-xx-MP	Mini CL to Standard CL High Flex

\* is replaced with either a "U" for Up or a "D" for Down  
 xx represents the cable length in meters (maximum 5 meters)  
**Custom variations available. Please contact customer service for additional information.**

