30D Series



The 30D Series enclosure is designed to house up to 30 x 44mm cross section inline cameras, lasers, or sensors. It is designed to provide protection from impact, dust, dirt, splashed water, and/or idle hands.

Product Features

- Low cost
- Captive fasteners
- Adjustable to handle long or wide angle lenses
- Available in two standard body lengths: 190.5 or 250mm
- Custom lengths available

Construction

- 304 stainless steel body
- 18-8 fasteners
- Anodized aluminum base
- Tumbled polish finish

Environment

• NEMA 12/IP64

Accessories


- Pan & Tilt Mount
- Shutter
- KG1 viewport

	5
	Lens Size Viewing Window
Lamera and	Lens Nize viewing Window

Camera and	Lens Size	Viewing	Window
------------	-----------	---------	--------

Universal Models	Camera Mounting	Viewport	Viewing Area	Cable Entry
Model 30D-AD Length: 191mm Net weight: 1.2 kg (2.6 lbs), Gross weight: 1.8 kg (4 lbs)	Universal camera mount	Abrasion resistant optical grade acrylic	58mm Dia.	PG29 Split cable gland
Model 30D-AE Length: 191mm Net weight: 1.2 kg (2.6 lbs), Gross weight: 1.8 kg (4 lbs)	Universal camera mount	Soda Lime glass	58mm Dia.	PG29 Split cable gland
Model 30D-AF Length: 191mm Net weight: 1.2 kg (2.6 lbs), Gross weight: 1.8 kg (4 lbs)	Universal camera mount	Soda Lime glass	58mm Dia.	PG29 Split cable gland
Model 30D-BC Length: 254mm Net weight: 2.3 kg (5 lbs), Gross weight : 2.3 kg (5.1lbs)	Universal camera mount	Soda Lime glass	58mm Dia.	PG29 Split cable gland
Model 30D-BF Length: 254mm Net weight: 2.3 kg (5 lbs), Gross weight : 2.3 kg (5.1lbs)	Universal camera mount	Soda Lime glass	58mm Dia.	PG29 Split cable gland
Camera Specific Models	Camera mounting			
Model 30D-EA Length: 191mm Net weight: 1.2 kg (2.6 lbs), Gross weight: 1.8 kg (4 lbs)	PPT C Series	Soda Lime glass	58mm Dia.	PG29 Split cable gland
Model 30D-EB Length: 191mm Net weight: 1.2 kg (2.6 lbs), Gross weight: 1.8 kg (4 lbs)	PPT C Series	Abrasion resistant optical grade acrylic	58mm Dia.	PG29 Split cable gland



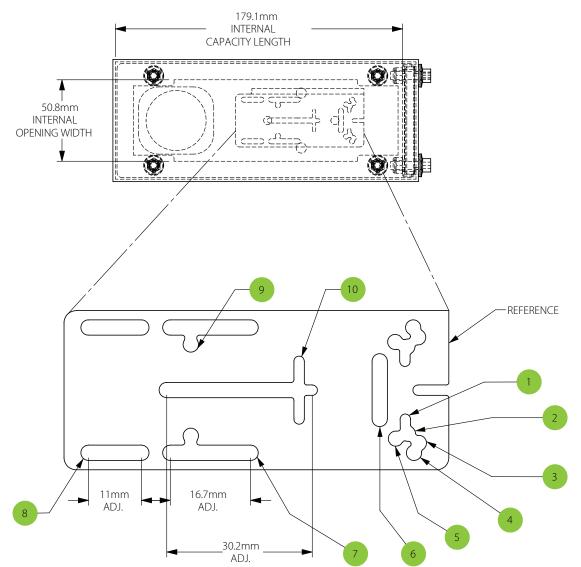

Item Number	Fastener Size, metric	Hole Spacing Across Width, mm	Distance from Reference, mm
1	M2	12	9.0
2	M3	18	8.5
3	M3	22	6.3
4	M3	26	7.2
5	M3	20	11
6	M3	12	14.4
7	M3	26	Slot DIM. Above
8	M3	26	Slot DIM. Above
9	M3	19	53.6
10	M2	12	31.1

Pyramid Imaging

945 East 11th Avenue Tampa, FL 33605 Phone: (813) 984-0125 Contact: Sales@pyramidimaging.com https://pyramidimaging.com