

**overview**

- Integrated flash controller
- User management
- Password protection
- Backup & Restore function
- Coordinate transformation
- flexible result conjunction
- Download VeriSens® Application Suite: [www.baumer.com/vs-sw](http://www.baumer.com/vs-sw)



**technical data**

**general data**

resolution	640 × 480 px
sensor type	1/4" CCD, color
illumination	direct connection (integrated flash controller)
illumination connection	as accessory
high-resolution mode	max. 50 inspections per second
number of jobs (products)	≤ 255
features per job	32
signal processing	Baumer FEX® 5.0
defect image memory	32
lens	C-mount

**electrical data**

voltage supply range +Vs	18 ... 30 V DC
power consumption	typical 5 W ( $I_{max} = 1,5$ A at 24 V)
digital inputs	5 inputs (8 ... 30 V) trigger job selection external teach-in encoders (CH-A, CH-B) 500 kHz
digital outputs	3 outputs (PNP) Pass / Fail Flash Sync Alarm Camera Ready Output Enable
initial setup	Ethernet (10BASE-T / 100BASE-TX)
process interface	TCP/UDP (Ethernet) RS485
visualization	web interface

**mechanical data**

width	53 mm (without lens/tube)
height	99,5 mm (without lens/tube)
depth	49,8 mm (without lens/tube)
weight	≤ 300 g (without lens/tube)
material	housing: aluminum cover glass: PMMA

**environmental conditions**

operating temperature	+5 ... +55 °C @ T = measurement point
storage temperature	-20 ... +70 °C
case temperature	max. +50 °C
humidity	0 ... 90 % (non-condensing)
protection class	IP 67 (with tube)
vibration load	IEC 60068-2-6 IEC 60068-2-64
mechanical shock resistance	EN 60068-2-27

**feature checks**

part location	part location on contours part location on edges part location on circle part location on text line
geometry	distance circle angle count edges point position

**technical data**

**feature checks**

feature comparison	count contour points
	contour comparison
	area size
	count areas
	pattern comparison
	color identification
	color positioning

**integrated flash controller**

voltage	12 V DC or 24 V DC (permanent) 24 V DC or 48 V DC (pulsed)
current	$I_{max} = 800 \text{ mA}$ at 24 V DC (permanent) ( $\pm 10 \%$ , at least $\pm 100 \text{ mA}$ , at 25 °C) $I_{max} = 4 \text{ A}$ at 48 V DC (pulsed) (+10/-20 %, at least $\pm 100 \text{ mA}$ , at 25 °C)

**Electrical connection**



1: PWR (+18-30 V DC)	7: OUT3
2: Ground	8: IN3
3: IN1 (Trigger)	9: RS485+
4: OUT1	10: IN4
5: IN2	11: IN5
6: OUT2	12: RS485-



1: TD+	3: TD-
2: RD+	4: RD-



1: +24 V or +48 V Flash	3: Ground
2: +12 V or +24 V Flash	4: Flash Sync

voltage outputs configurable by software

**integrated flash controller**

flash time	max. 1 ms (Duty Cycle max. 1:10)
------------	----------------------------------


**conformity**

conformity	CE RoHS
------------	------------


**non-volatile memory**

flash memory size	256 Mbit Flash S29GL256P10FFI010
-------------------	----------------------------------

**dimension drawing**

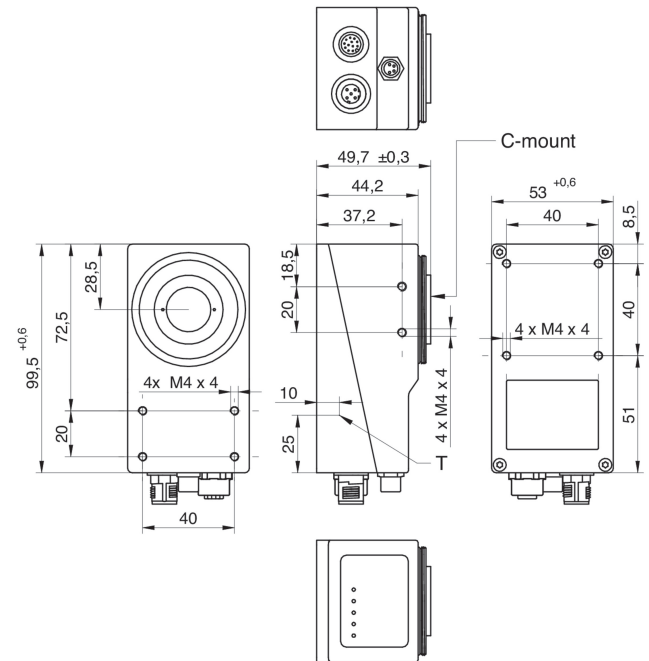

**C-mount support**



# VS XC100C03X00RP

XC100

Article number: 11128427

## XC Tube, XC Tube Module

