

Xenon-Emerald Lens

XENON-EMERALD 2.8/100-S

Many camera manufacturers are using the F-Mount bayonet as the camera/lens interface of their high resolution area and line scan cameras. Schneider-Kreuznach has addressed this topic with the new series of industrial XENON EMERALD lenses. These low distortion lenses with an image circle diameter of 43.2mm are compact, robust, lockable in distance and aperture, designed for close up range or infinity and optimized for a uniform image quality over the whole sensor area. The 400-1000 nm broadband coating makes them suitable for applications in the visible and the near infrared spectrum. The option of alternative mounts like e.g. Canon bayonet or M42 thread makes them even more flexible for a wide range of applications in machine vision, quality control, web inspection and other image processing applications.



XENON-EMERALD 2.8/100

Key Features

- Robust mechanics for rough industrial environment
- Compact design and low weight
- Focus and iris setting lockable
- High resolution optics 400 - 700 nm (VIS) / 700 - 1000 nm (NIR)
- Corrected for close up range
- Constant MTF over the entire image field

Applications

- Machine vision and other imaging applications
- Quality control
- Web inspection
- Surface inspection
- Line scan applications

Technical Specifications

F-number	2.8
Focal length	100.1 mm
Image circle	43.2 mm
Transmission	400 - 1000 nm
Interface	F-Mount
Weight	463 gr.
Filter Thread	M43 x 0.75
Code No. (F-Mount)	1064881
Code No. (Canon-Mount)	1070119
Code No. (V48)	1070400



Contact

Jos. Schneider Optische Werke GmbH
 Ringstraße 132
 55543 Bad Kreuznach
 Germany
 Phone +49 671 601-205
 Fax +49 671 601-286
www.schneiderkreuznach.com
industrie@schneiderkreuznach.com

Schneider Optical Technologies Co., Ltd.
 Rm. A505 Yingdali Science Park, Hongmian Rd.,
 Futian Free Trade Zone, Shenzhen 518038,
 P.R. China
 Phone: +86 755 88 32 11 70
 Fax: +86 755 88 32 11 75
www.schneiderkreuznach.com
info@schneider-asiapacific.com


Schneider Optics Inc.
 285 Oser Ave.
 Hauppauge, NY 11788
 USA
 Phone +1 631 761-5000
 Fax +1 631 761-5090
www.schneideroptics.com/industrial
industrial@schneideroptics.com

XENON-EMERALD 2.8/100-S

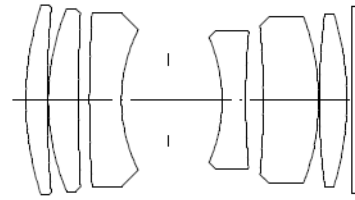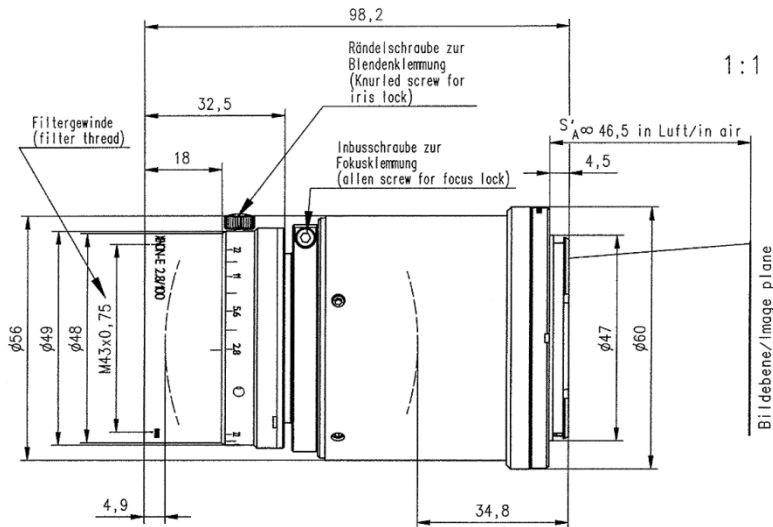

XENON-EMERALD 2.8/100 S


f^*	= 100.1 mm	β_P^*	= 1.270
s_F	= -48.6 mm	s_{EP}	= 30.3 mm
s_F^*	= 75.3 mm	s_{AP}^*	= -51.8 mm
HH^*	= -16.1 mm	Σd	= 60.2 mm

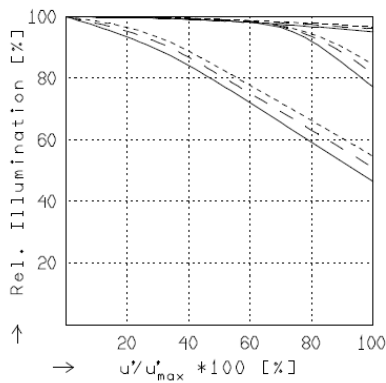

RELATIVE ILLUMINATION

The relative illumination is shown for the given focal distances or magnifications.


	$f / 2.8$	$f / 4.0$	$f / 5.6$
—	$\beta^* = -0.0200$	$u_{max}^* = 21.6$	$00^* = 5192.$
- -	$\beta^* = -0.1000$	$u_{max}^* = 21.5$	$00^* = 1195.$
----	$\beta^* = -0.1667$	$u_{max}^* = 21.5$	$00^* = 802.$

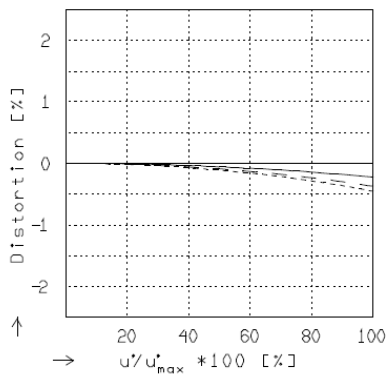

DISTORTION

Distortion is shown for the given focal distances or magnifications. Positive values indicate pincushion distortion and negative values barrel distortion.

—	$\beta^* = -0.0200$	$u_{max}^* = 21.5$	$00^* = 5192.$
- -	$\beta^* = -0.1000$	$u_{max}^* = 21.5$	$00^* = 1195.$
----	$\beta^* = -0.1667$	$u_{max}^* = 21.5$	$00^* = 802.$

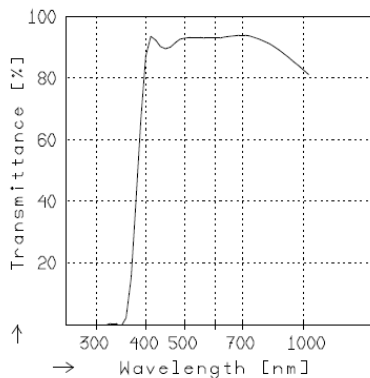

TRANSMITTANCE

Relative spectral transmittance is shown with reference to wavelength.




XENON-EMERALD 2.8/100-S

XENON-EMERALD 2.8/100 S

MODULATION with reference to the relative image height

Wavelength λ	[nm]	555	655	605	505	455	405
Spectral weighting	[%]	27.4	16.6	25.8	21.7	8.5	0.0
Spatial frequency R	[1/mm]	20	40	60			
Format	[mm X mm]	24.0	36.0				
Diagonal $2u'$	[mm]	43.2					

radial —
tangential - -

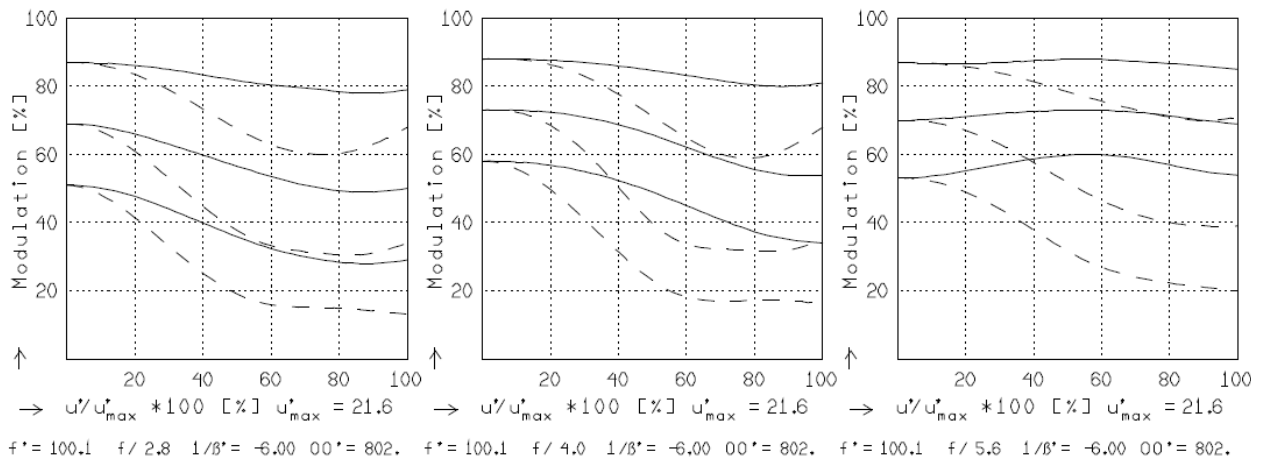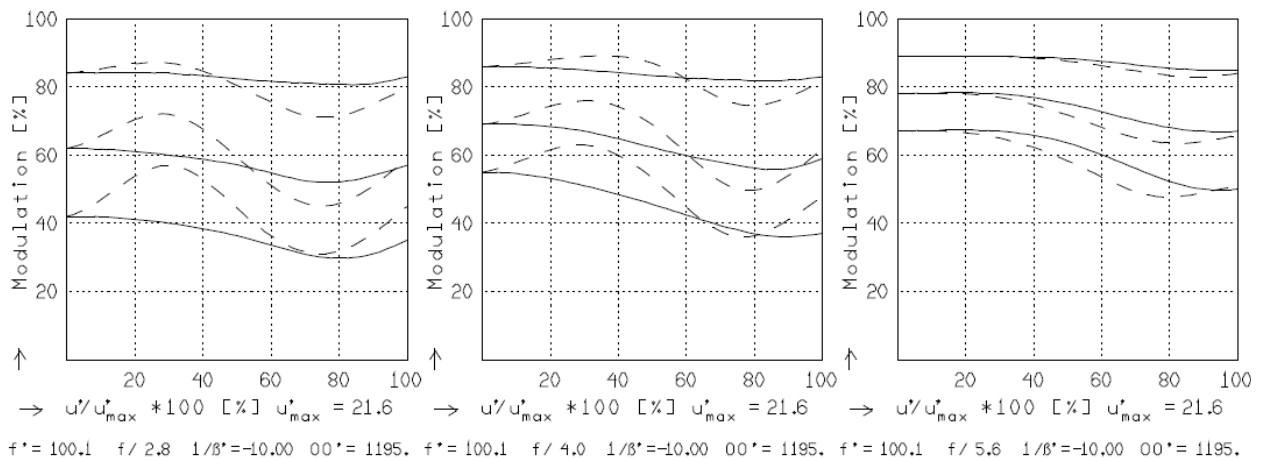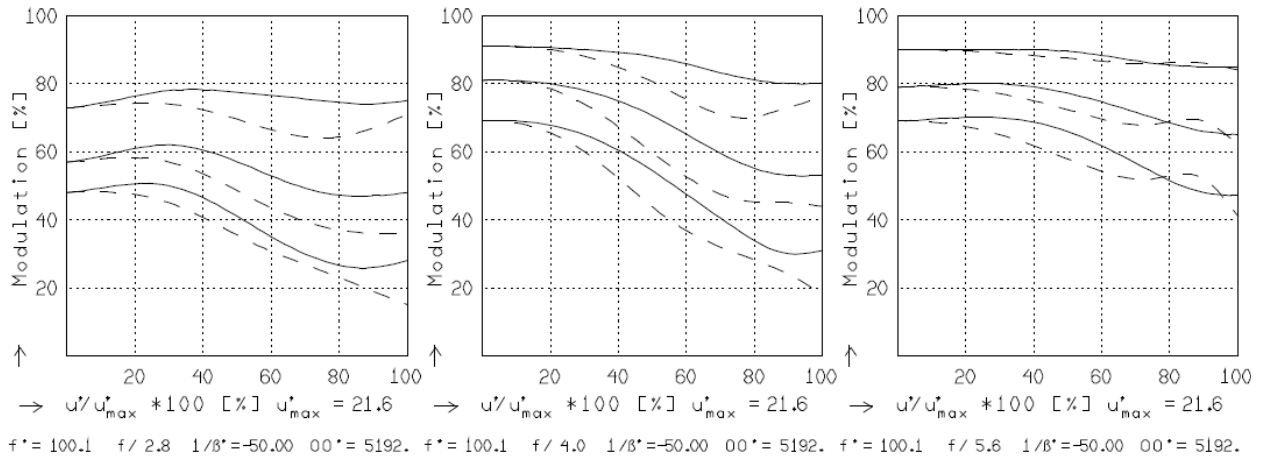

Focusing : MTF_{max} at $f / 2.8$, $R = 60$ 1/mm, $u'/u'_{max} = 0$