

Macro-Varon 4.5/85 with beam splitter

Macro-Varon 4.5/85 with beam splitter

This lens is designed to be used in line scan applications where coaxial illumination is required. The 60 mm beam splitter cube offers the opportunity to create an in-line illumination for high reflective objects. Coaxial illumination is ideal for demanding circuit boards and other high resolution applications where a bright, diffuse uniform illumination is needed.

This lens offers a high optical performance at a 3.5x magnification over the entire field. The lens design considers the optical glass path of the high quality beam splitter to achieve a top performance. Lens and beam splitter assembly are precisely aligned to each other, so that a maximum of light is captured and directed to the image plane of 12k cameras with 5µm pixel size, with almost no loss at the image edges.



Macro-Varon with beam splitter

Key Features

- 3.5x Magnification
- Lens and Beam splitter Cube
- Optimized for 12K Cameras with 5µm Pixel sizes
- Separate azimuth alignment of Beam splitter and Lens


Applications

- PCB / FPD Inspection
- LED inspection
- Flat Glass Inspection
- Wafer Inspection
- Line Scan Applications

Technical Specifications

F-number	4.5
Focal length	85.2 mm
Image circle	62 mm
Recommended Magnification	3.5x
Interface	V38-Mount
Weight	410 gr.
Field of View	17.7 mm
Working distance	62.1 mm
Numerical Aperture	0.087
Illumination drop off	Max. 8 %
Beam splitter size	60 x 25 x 25 mm
Code No.	1069837

Figure 1: relative illumination with beam splitter

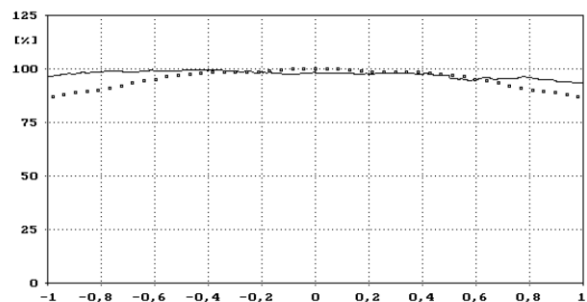



Contact

Jos. Schneider Optische Werke GmbH
 Ringstraße 132
 55543 Bad Kreuznach
 Germany
 Phone +49 671 601-205
 Fax +49 671 601-81-205
www.schneiderkreuznach.com/industrialoptics
industrie@schneiderkreuznach.com

Schneider Asia Pacific Ltd.
 20/F Central Tower, 28 Queen's Road
 Central, Hong Kong
 China
 Phone +852 8302 0301
 Fax +852 8302 4722
www.schneider-asiapacific.com
info@schneider-asiapacific.com


Schneider Optics Inc.
 285 Oser Ave.
 Hauppauge, NY 11788
 USA
 Phone +1 631 761-5000
 Fax +1 631 761-5090
www.schneideroptics.com/industrial
industrial@schneideroptics.com

Macro-Varon 4.5/85 with beam splitter Pyramid Imaging

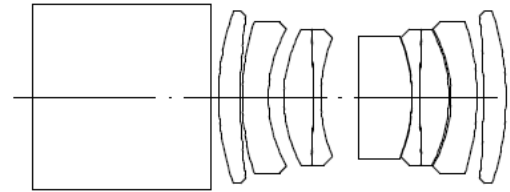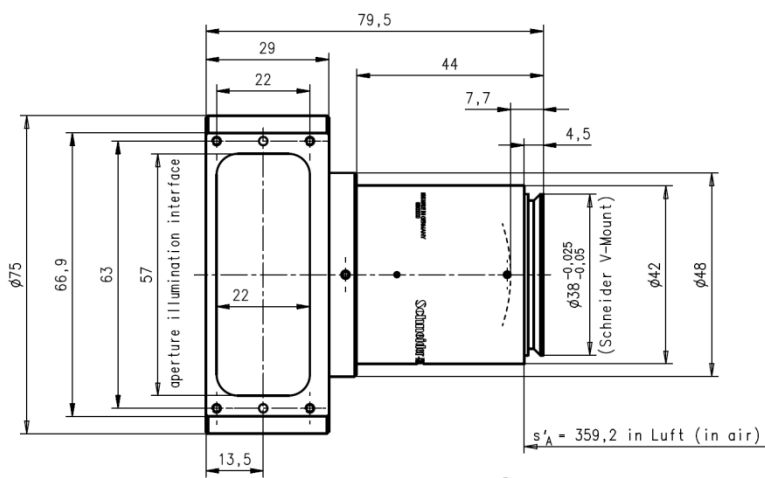

MRV 4.5/85

f'	= 85.2 mm	β'_p	= 1.037
s_F	= -42.9 mm	s_{EP}	= 39.3 mm
$s_{F'}$	= 64.1 mm	s_{AP}	= -24.2 mm
HH'	= 2.9 mm	Σd	= 66.3 mm

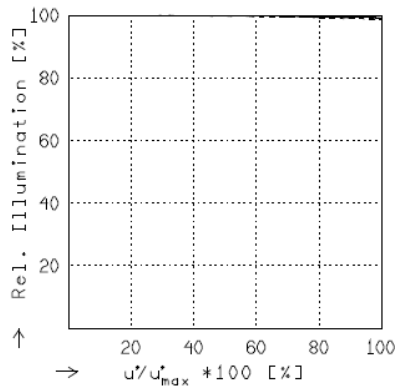


RELATIVE ILLUMINATION

The relative illumination is shown for the given focal distances or magnifications.

$f / 4.5$


—	$\beta' = -4.0000$	$u'_{max} = 31.0$	$00' = 535.$
- -	$\beta' = -3.5000$	$u'_{max} = 31.0$	$00' = 496.$
- - -	$\beta' = -3.0000$	$u'_{max} = 31.0$	$00' = 457.$

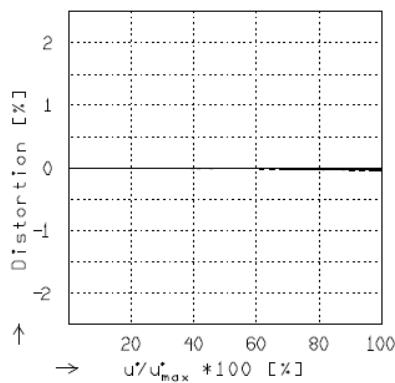

DISTORTION

Distortion is shown for the given focal distances or magnifications. Positive values indicate pincushion distortion and negative values barrel distortion.

—	$\beta' = -4.0000$	$u'_{max} = 31.0$	$00' = 535.$
- -	$\beta' = -3.5000$	$u'_{max} = 31.0$	$00' = 496.$
- - -	$\beta' = -3.0000$	$u'_{max} = 31.0$	$00' = 457.$

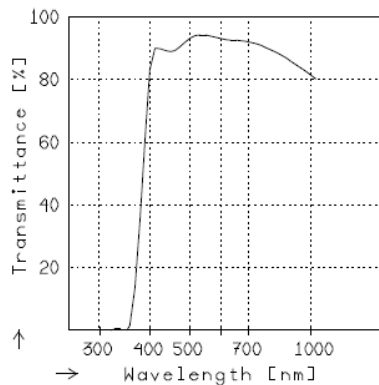

TRANSMITTANCE

Relative spectral transmittance is shown with reference to wavelength.




Macro-Varon 4.5/85 with beam splitter

MRV 4.5/85

MODULATION with reference to the relative image height

Wavelength λ	[nm]	575	675	625	525	475	425
Spectral weighting	[%]	21.9	13.1	18.8	22.5	16.0	7.7
Spatial frequency R	[1/mm]	13	25	50			
Format	[mm X mm]	0.0	62.0				
Diagonal $2u^*$	[mm]	62.0					

radial ———
 tangential - - -

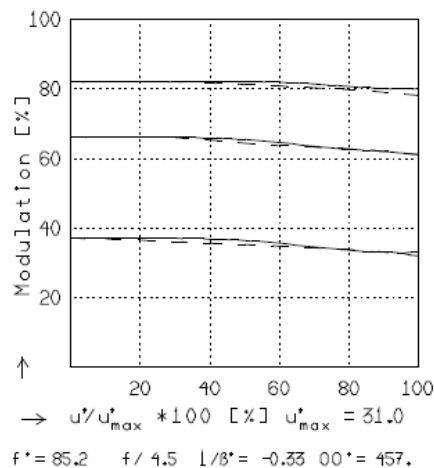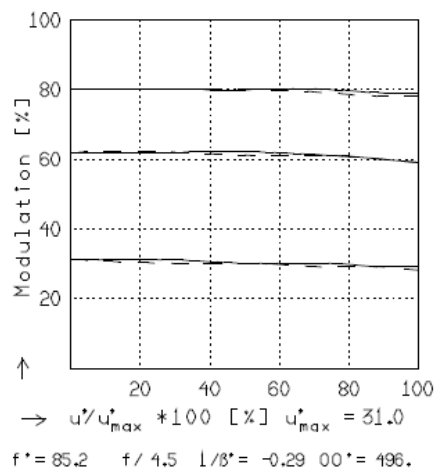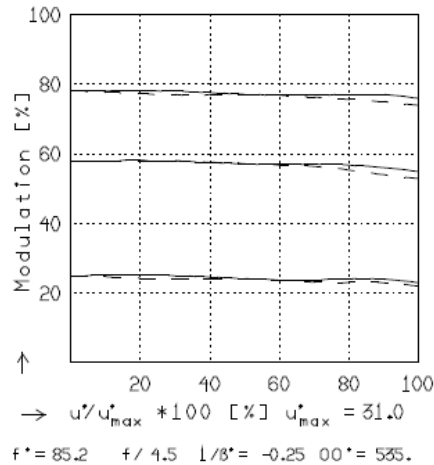


Pyramid Imaging
 945 East 11th Avenue Tampa, FL 33605
 sales@pyramidimaging.com
 www.pyramidimaging.com
 813-786-3785

Focusing : MTF_{max} at $f/4.5$, $R = 50$ 1/mm , $u^*/u_{max}^* = 0$