

Line scan lens

Apo-Componon 4.5/90-0018

Wherever complex web and surface inspections are concerned, the line scan image capture method is used in most cases. Due to the principle used, this method requires a very careful choice of camera and an optimally adapted lens in order to achieve maximum system performance. It is essential to observe important application-specific and physical parameters: the size of the CCD or CMOS imaging sensor in the camera defines the minimum required image circle of the lens.



Apo-Componon 4.5/90

Key Features

- Very high optical image quality in the large sensor range
- Vibration-insensitive for stable optical performance
- Reverse position of the lens possible to enlarge the magnification range
- Lockable distance and aperture settings
- Use in best azimuth position possible
- Industry-compatible V-mount interface
- 100% quality control guarantees reliability and constant quality
- Low maintenance requirements, therefore high system availability

Applications

- Web and surface inspections
- Quality control
- FPD inspection
- PCB inspection
- OLED inspection
- Line scan applications

Technical Specifications

F-number	4.5
Focal length	90.8 mm
Image circle	86 mm
Magnification	-0,30
Transmission	400 - 1000 nm
Interface	V-Mount
Weight	140 gr.
Option	Optical filter

Contact



Jos. Schneider Optische Werke GmbH
 Ringstraße 132
 55543 Bad Kreuznach
 Germany
 Phone +49 671 601-387
 Fax +49 671 601-286
www.schneiderkreuznach.com/industrialoptics
industrie@schneiderkreuznach.com

Schneider Asia Pacific Ltd.
 20/F Central Tower, 28 Queen's Road
 Central, Hong Kong
 China
 Phone +852 8302 0301
 Fax +852 8302 4722
www.schneider-asiapacific.com
info@schneider-asiapacific.com

Schneider Optics Inc.
 285 Oser Ave.
 Hauppauge, NY 11788
 USA
 Phone +1 631 761-5000
 Fax +1 631 761-5090
www.schneideroptics.com/industrial
industrial@schneideroptics.com

Apo-Componon 4.5/90

Pyramid Imaging

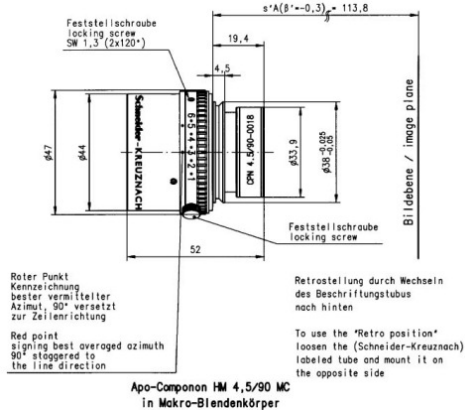

R 4839.1 APO-CPN 4.5/90

$f' = 90.8 \text{ mm}$ $\beta_p = 1.011$

$s_F = -66.7 \text{ mm}$ $s_{EP} = 23.1 \text{ mm}$

$s_{F^*} = 67.9 \text{ mm}$ $s_{AP} = -23.9 \text{ mm}$


$HH' = -3.6 \text{ mm}$ $\Sigma d = 43.5 \text{ mm}$

R 4839.1 APO-CPN 4.5/90

MODULATION with reference to the relative image height



Wavelength λ [nm]	555	655	605	505	455	405
Spectral weighting [%]	19.6	23.7	22.2	15.7	12.1	6.7
Spatial frequency R [1/mm]	20	40	80			
Format [mm X mm]	90.0	X	0.0			
Diagonal $2u'$ [mm]	90.0					

radial —
tangential - -

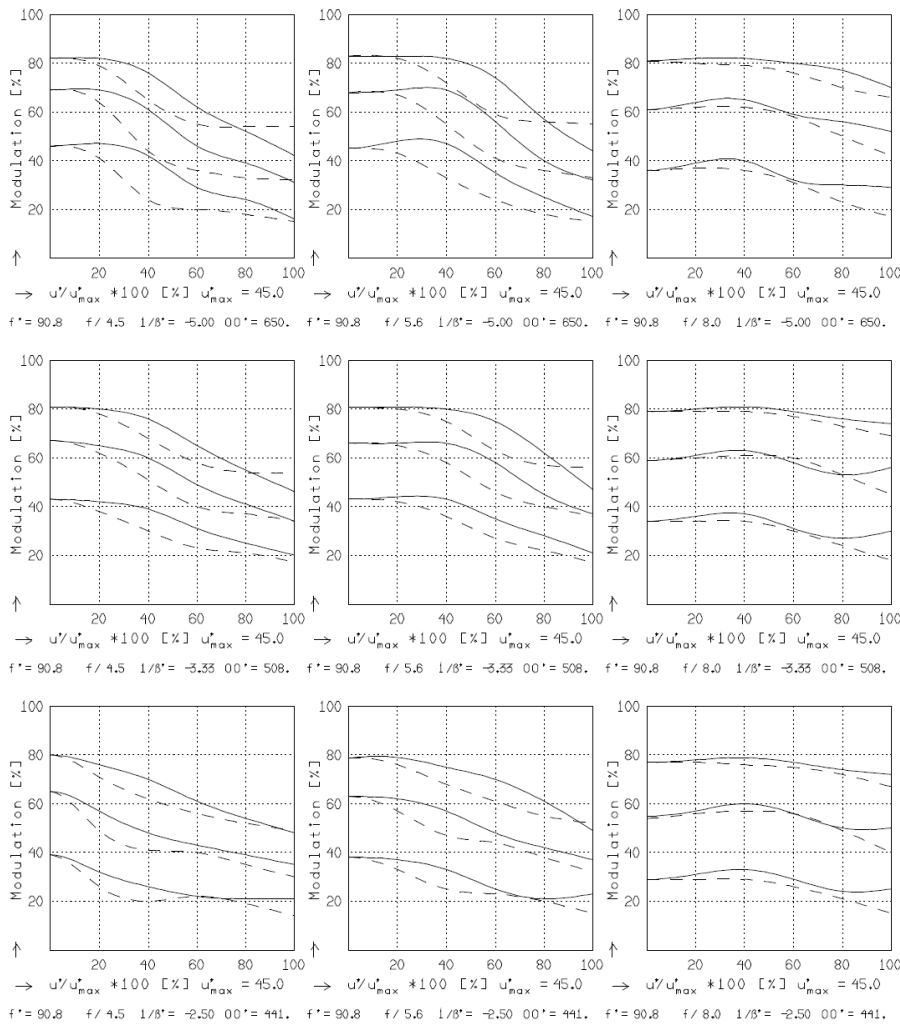


Focusing : MTF_{max} at $f / 4.5$, $R = 80$ 1/mm, $u'/u'_{max} = 0$

Apo-Componon 4.5/90

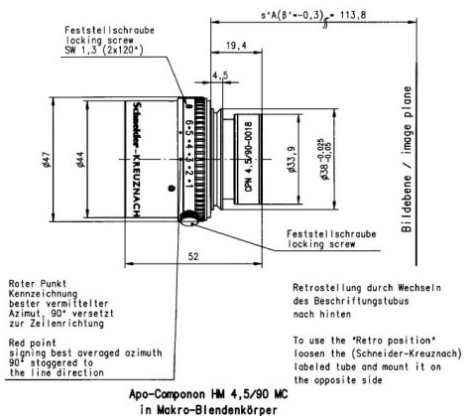


R 4839.1	AP0-CPN 4.5/90
$f' = 90.8 \text{ mm}$	$\beta_p = 1.011$
$s_F = -66.7 \text{ mm}$	$s_{EP} = 23.1 \text{ mm}$
$s_F' = 67.9 \text{ mm}$	$s_{AP} = -23.9 \text{ mm}$
$HH' = -3.6 \text{ mm}$	$\Sigma d = 43.5 \text{ mm}$

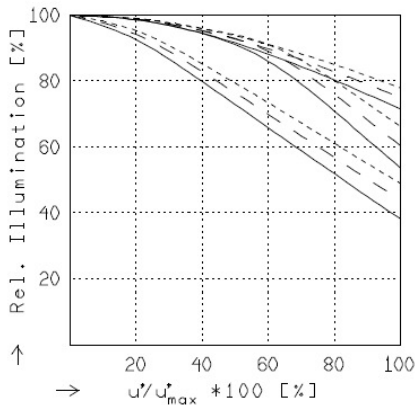

RELATIVE ILLUMINATION

The relative illumination is shown for the given focal distances or magnifications.


	$f / 4.5$	$f / 5.6$	$f / 8.0$
—	$\beta' = -0.2000$	$u'_{max} = 45.0$	$00' = 650.$
- -	$\beta' = -0.3000$	$u'_{max} = 44.9$	$00' = 508.$
- - - -	$\beta' = -0.4000$	$u'_{max} = 44.9$	$00' = 441.$

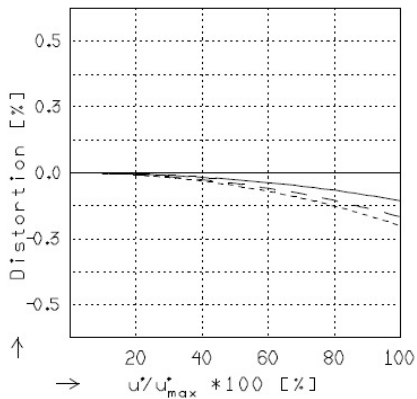

DISTORTION

Distortion is shown for the given focal distances or magnifications. Positive values indicate pincushion distortion and negative values barrel distortion.

—	$\beta' = -0.2000$	$u'_{max} = 44.9$	$00' = 650.$
- -	$\beta' = -0.3000$	$u'_{max} = 44.9$	$00' = 508.$
- - - -	$\beta' = -0.4000$	$u'_{max} = 44.9$	$00' = 441.$

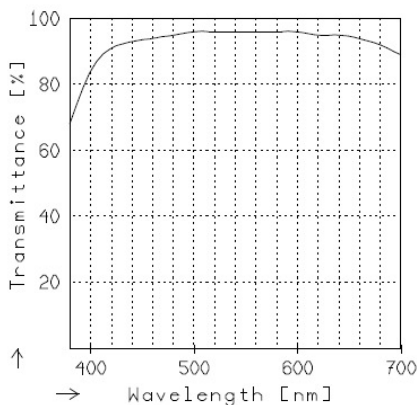

TRANSMITTANCE

Relative spectral transmittance is shown with reference to wavelength.



945 East 11th Avenue Tampa, FL 33605

Phone: (813) 984-0125

Contact: Sales@pyramidimaging.com

<https://pyramidimaging.com>