

# 3 Mega Pixel lens

## Tele-Xenar 2.2/70

In accordance with the sensitivity of modern 2 / 3" CCD and CMOS sensors, the 3 megapixel lenses are corrected and broadband-coated for the spectral range of 400 – 1000 nm ( VIS + NIR ). Even under production and / or extreme conditions, the robust mechanical design with lockable focus and iris setting mechanism guarantees reliable continuous use in which the set optical parameters remain in place.



Tele-Xenar 2.2/70

### Key Features

- High-resolution optics
- Highest optical imaging performance even with smallest pixel sizes
- Broadband coating (400 - 1000 nm)
- Compact and low weight
- Vibration insensitivity for stable imaging performance
- Focus and iris setting lockable

### Applications

- Machine Vision and other imaging applications
- 3D measurement
- Traffic
- Medical
- Robot vision
- Food processing

### Technical Specifications

F-number	2.2
Focal length	70.5 mm
Image circle	11 mm
Transmission	400 - 1000 nm
Interface	C-Mount
Weight	200 gr.
Option	Optical filter

### Contact



Jos. Schneider Optische Werke GmbH  
 Ringstraße 132  
 55543 Bad Kreuznach  
 Germany  
 Phone +49 671 601-387  
 Fax +49 671 601-286  
[www.schneiderkreuznach.com/industrialoptics](http://www.schneiderkreuznach.com/industrialoptics)  
[industrie@schneiderkreuznach.com](mailto:industrie@schneiderkreuznach.com)

Schneider Asia Pacific Ltd.  
 20/F Central Tower, 28 Queen's Road  
 Central, Hong Kong  
 China  
 Phone +852 8302 0301  
 Fax +852 8302 4722  
[www.schneider-asiapacific.com](http://www.schneider-asiapacific.com)  
[info@schneider-asiapacific.com](mailto:info@schneider-asiapacific.com)

Schneider Optics Inc.  
 285 Oser Ave.  
 Hauppauge, NY 11788  
 USA  
 Phone +1 631 761-5000  
 Fax +1 631 761-5090  
[www.schneideroptics.com/industrial](http://www.schneideroptics.com/industrial)  
[industrial@schneideroptics.com](mailto:industrial@schneideroptics.com)

# Tele-Xenar 2.2/70

# Pyramid Imaging

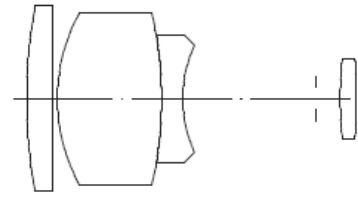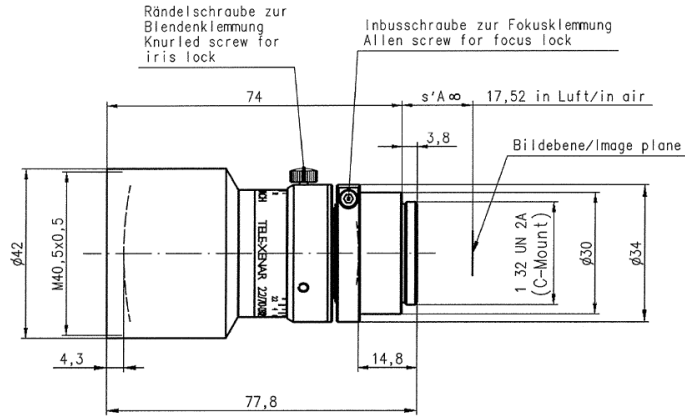

## TXR 2.2/70


$f'$	= 70.5 mm	$\beta_p'$	= 0.494
$s_F$	= -27.8 mm	$s_{EP}$	= 115.0 mm
$s_{F'}$	= 28.5 mm	$s_{AP}$	= -6.3 mm
$HH'$	= -26.0 mm	$\Sigma d$	= 58.8 mm

## TXR 2.2/70

MODULATION with reference to the relative image height



Wavelength $\lambda$	[nm] :	555	655	605	505	455	405
Spectral weighting	[%] :	19.6	23.7	22.2	15.7	12.1	6.7
Spatial frequency R	[1/mm] :	10	20	30			
Format	[mm X mm] :	6.6	X	8.8			
Diagonal $2u'$	[mm] :	11.0					

radial —  
tangential - -

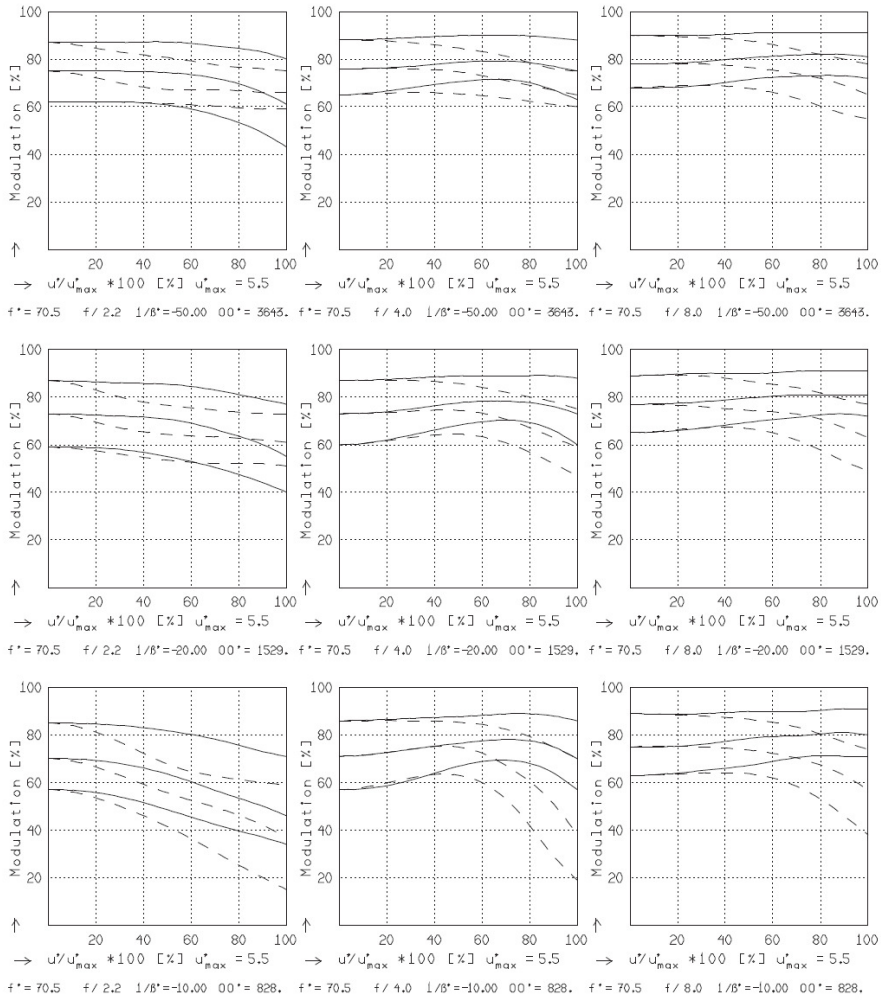


Focusing : MTF<sub>max</sub> at f / 2.2 , R = 30 1/mm, u'/u'<sub>max</sub> = 0

# Tele-Xenar 2.2/70

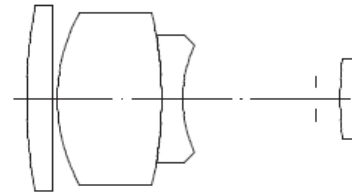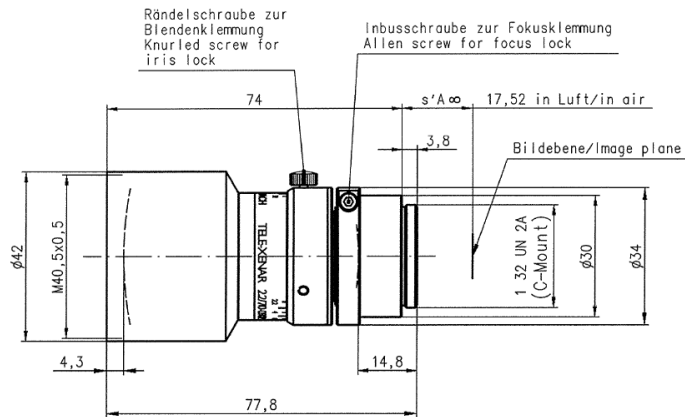

TXR 2.2/70


$f' = 70.5 \text{ mm}$      $\beta_p = 0.494$   
 $s_F = -27.8 \text{ mm}$      $s_{EP} = 115.0 \text{ mm}$   
 $s_{F'} = 28.5 \text{ mm}$      $s_{AP} = -6.3 \text{ mm}$   
 $HH' = -26.0 \text{ mm}$      $\Sigma d = 58.8 \text{ mm}$

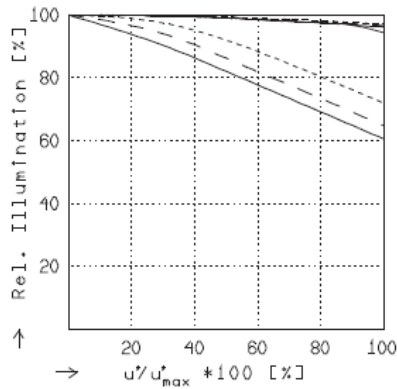

## RELATIVE ILLUMINATION

The relative illumination is shown for the given focal distances or magnifications.


	$f / 2.2$	$f / 4.0$	$f / 8.0$
—	$\beta' = -0.0200$	$u'_{max} = 5.5$	$00' = 3642.$
- -	$\beta' = -0.0500$	$u'_{max} = 5.5$	$00' = 1529.$
----	$\beta' = -0.1000$	$u'_{max} = 5.5$	$00' = 827.$

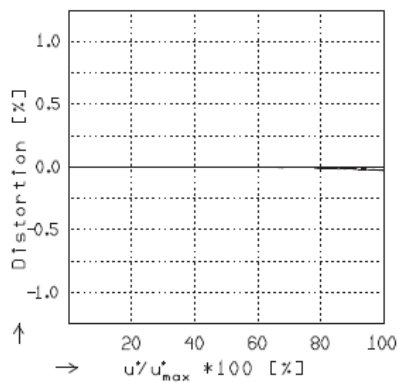

## DISTORTION

Distortion is shown for the given focal distances or magnifications. Positive values indicate pincushion distortion and negative values barrel distortion.

—	$\beta' = -0.0200$	$u'_{max} = 5.5$	$00' = 3642.$
- -	$\beta' = -0.0500$	$u'_{max} = 5.5$	$00' = 1529.$
----	$\beta' = -0.1000$	$u'_{max} = 5.5$	$00' = 827.$

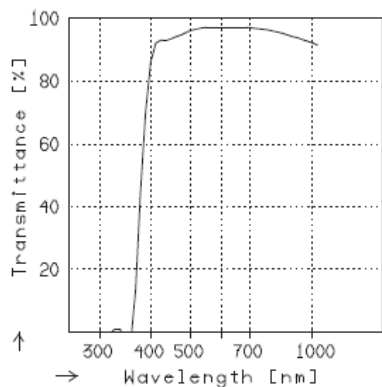

## TRANSMITTANCE

Relative spectral transmittance is shown with reference to wavelength.



945 East 11<sup>th</sup> Avenue Tampa, FL 33605

Phone: (813) 984-0125

Contact: Sales@pyramidimaging.com

<https://pyramidimaging.com>