Inductive proximity switch

IFRM 18P17A3/L

dimension drawing



general data	
mounting type	quasi-flush
nominal sensing distance Sn	8 mm
hysteresis	3 ... 20 % of Sr
output indicator	LED red

electrical data	
switching frequency	< 500 Hz
voltage supply range +Vs	10 ... 30 VDC
current consumption max. (no load)	10 mA
output circuit	PNP make function (NO)
voltage drop Vd	< 2 VDC
output current	< 200 mA
short circuit protection	yes
reverse polarity protection	yes

mechanical data	
type	cylindrical threaded
material (sensing face)	PBT
housing material	brass nickel plated
dimension	18 mm
housing length	50 mm
connection types	cable, 2 m
tightening torque max.	40 Nm

ambient conditions	
operating temperature	-25 ... +75 °C
protection class	IP 67

photo

connection diagram

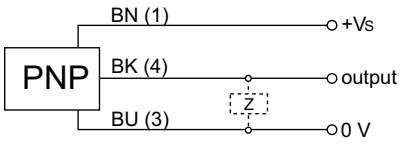

• Not for flush mounting in mild steel

Pyramid Imaging
Pyramid Imaging Inc
945 East 11th Avenue
Tampa, FL 33605
https://pyramidimaging.com
Sales@pyramidimaging.com
(813) 984-0125