


Pyramid Imaging Inc
945 East 11th Avenue
Tampa, FL 33605
<https://pyramidimaging.com>
Sales@pyramidimaging.com
(813) 984-0125

① IRIS CABLE	(+) RED	INPUT VOLTAGE
	(-) BLACK	GROUND
	WHITE	VIDEO SIGNAL
	GREEN	REMOTE CONTROL


② MOTOR CABLE	(+) GREEN	FOCUS NEAR
	(+) BLACK	FOCUS FAR
	(+) YELLOW	TELE
	(+) RED	WIDE

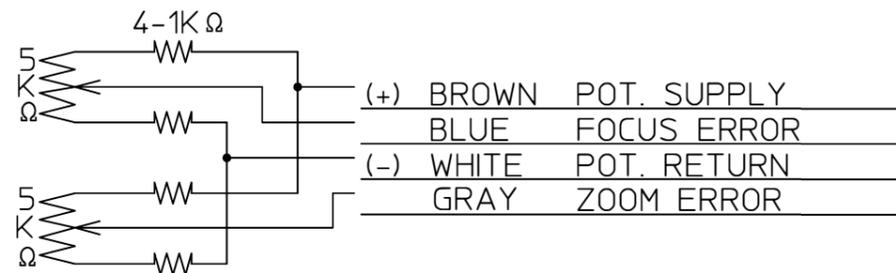

SPECIFICATION

1. USE	FOR 1/2" COLOR ,B/W CAMERA		
2. FOCAL LENGTH	f=8~120mm		
3. IRIS RANGE	F= 1.8 ~ 360		
4. IMAGE SIZE	φ 8 (6.4 x 4.8)		
5. BACK FOCAL LENGTH	14.9	mm	in air
6. FLANGE FOCAL LENGTH	17.526	mm	in air
7. FOCUS RANGE	∞ ~ 1.5 m		
8. FIELD ANGLE	DIA.	(W)	52.9° (T) 3.8°
	HOL.		43.2° 3.1°
	VER.		32.8° 2.3°
9. DISTORTION (TV)	-0.7 %		1.1 %
10. LENS CONSTRUCTION	15 GROUPS	18 ELEMENTS	
11. CLEAR APERTURE	FRONT φ 54	REAR φ 12.5	
12. WEIGHT	**Kg		

DC (DIRECT CONTROL)		
DRIVE COIL	RESISTOR	190Ω (20°C)
	COLOR	RED(+) 3pin BLACK 4pin
BRAKE COIL	RESISTOR	1150Ω (20°C)
	COLOR	YELLOW(+) 2pin GREEN 1pin
DRIVE VOLT.	OPEN	LESS THAN +4V
	CLOSE	OVER THAN 0V W/CLOSING SPRING



品名	1/2" 1.8/8-120mm
部番	S10-211