



### sensor information

sensor	ams (CMOSIS) CMV2000 V3
resolution	2048 × 1088 px
exposure time	0,03 ... 1000 ms
pixel size	5.5 × 5.5 µm
shutter type	Global shutter
sensor type	2/3" CMOS

### acquisition formats

image formats, interface	Full Frame, 2048 × 1088 px, max. 337 fps
frame rate max.	Binning 2×2, 1024 × 544 px, max. 337 fps
	Binning 1×2, 2048 × 544 px, max. 337 fps
	Binning 2×1, 1024 × 1088 px, max. 337 fps
pixel formats	Mono8
	Mono10

### image preprocessing

analog controls	Gain (0 ... 12 dB)
	Offset (0 ... 63 LSB 10 Bit)
color models	Mono
color processing	NA

### interfaces and connectors

data interface	Camera Link® Full, connector: 2 x Standard SDR26 (Mini CL)
process interface	M8 / 8 pins
power supply	M8 / 8 pins

### mechanical data

lens mount	C-mount
width	60 mm
height	60 mm
depth	47,95 mm
weight	≤ 285 g
material	housing: aluminum

### electrical data

voltage supply	12 ... 24 V DC (external power supply)
range +Vs	0 ... 12 V (PoCL)
power consumption	approx. 3,8 W @ 24 VDC
	approx. 3,8 W @ 12 VDC (PoCL)

### non-volatile memory

flash memory size	128 kB
-------------------	--------

### environmental conditions

operating temperature	+5 ... +64 °C @ T = measurement point
humidity	10 ... 90 % (non-condensing)
protection class	IP 40

### conformity


conformity	CE
	RoHS

# LXC-20M

Camera Link®, 2 Megapixel, Monochrome

Article number: 11143926

## dimension drawing

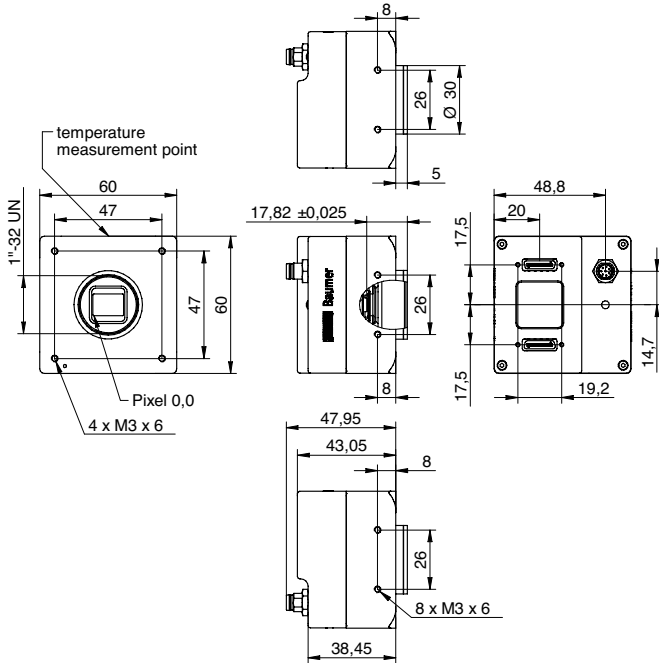

945 East 11<sup>th</sup> Avenue Tampa, FL 33605

Phone: (813) 984-0125

Contact: Sales@pyramidimaging.com

<https://pyramidimaging.com>