



DOME LIGHT WMDL7



ELECTRICAL:

Input Voltage: See xLDM700 spec sheet
 Input Current: See xLDM700 spec sheet
 Connector: Quick Connect, 5 pin Reverse Key Euro / Micro

MECHANICAL:

Materials: FDA compliant plastic and 316 stainless steel
 Weight: 7.3lbs / 3.3kg
 Dimensions: 7" / 177mm ID; 12" / 305mm OD visit
[http:// spectrumillumination.com/products/wmdl7/](http://spectrumillumination.com/products/wmdl7/)
 'Downloads' tab for detailed drawings

ENVIRONMENTAL:

Operating Temperature: 2° to 50°C
 IP rating: IP-68

ILLUMINATION:

Light Source: LED – 9 Colors & IR
 Quantity HB LED's: 10
 Light Emitting Pattern: 7" / 177.8mm
 LED Life: up to 100,000 hours*.
 *Contact us for LED life information

PART NUMBER DESIGNATION: WMDL7-XXX
 XXX = Light Color – 450, 470, 505, 530, 590, 630,
 WHI, NWH, WWH, 850 & 940.

WARNING !!!
 Use Only Spectrum Illumination
 LDM Driver with Monster Lights.
 Do Not Connect Monster Lights
 Directly to 24VDC!



Color	Dash #	λ Dominant Typical	λ Dominant Range	Spectral Half-width $\Delta\lambda_{1/2}$	λ Peak Typical	Units
Infrared	-940	940	n/a	45	945	nm
Infrared	-850	850	n/a	35	855	nm
Red	-630	625	620 - 630	15	633	nm
Amber	-590	590	585 - 595	15	594	nm
Green	-530	528	520 - 535	37	522	nm
Cyan	-505	505	500 - 520	40	510	nm
Blue	-470	475	465 - 485	20	465	nm
Royal Blue	-450	451	440 - 455pk	20	448	nm
Pure White	-WHI	Color Temp 5700 - 7000K CRI 70 typ*				
Natural White	-NWH	Color Temp 4000 - 5000K CRI 70 typ*				
Warm White	-WWH	Color Temp 2200 - 3750K CRI 70 typ*				


* Narrow Color Temp / Higher CRI available on request



Light includes LDM DIN rail mount
 constant current driver and 4-meter
 cable (driver is available with variable or
 0-10VDC intensity control - cable also
 available in 8, 15 and 30-meter

MOUNTING:

Care must be taken to mount the light in orientation that allows proper water drainage in washdown locations.

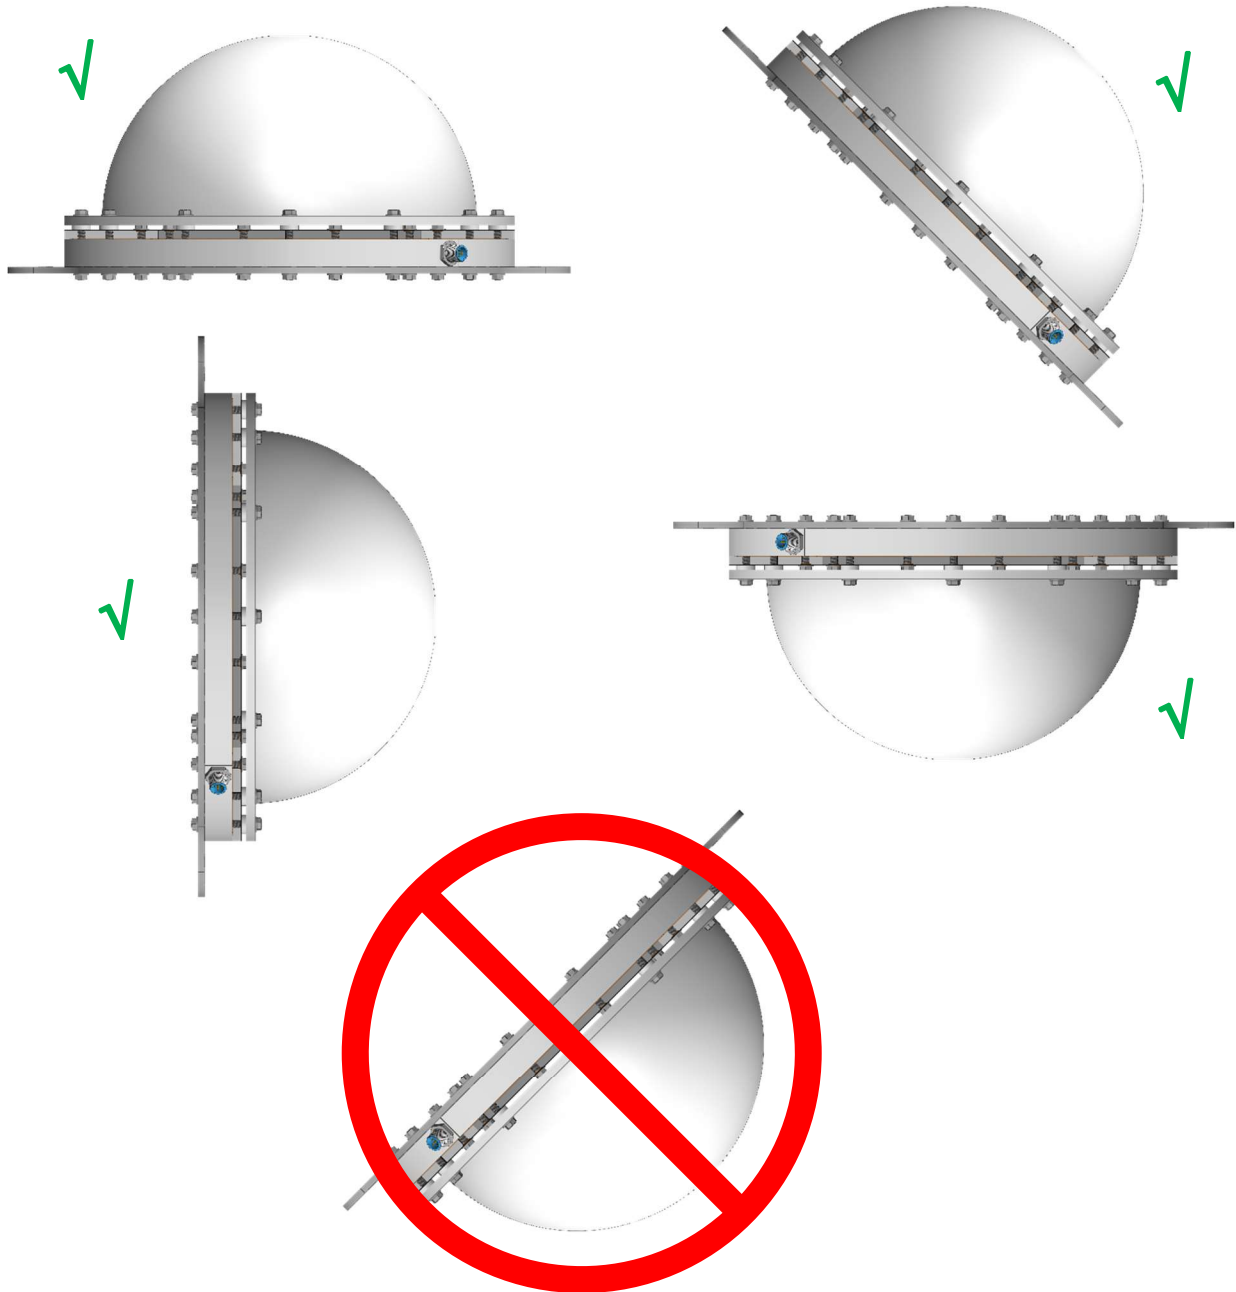

Spectrum Illumination • 5114 Industrial Park Rd. • Montague, MI 49437