



sensor information

sensor	Sony IMX265
resolution	2048 × 1536 px
exposure time	0,001 ... 60000 ms
pixel size	3.45 × 3.45 µm
shutter type	Global shutter
sensor type	1/1.8" CMOS

acquisition formats

image formats, interface	Full Frame, 2048 × 1536 px, max. 39 fps
frame rate max.	Binning 2×2, 1024 × 768 px, max. 55 fps Binning 2×1, 1024 × 1536 px, max. 55 fps Binning 1×2, 2048 × 768 px, max. 55 fps

image formats, acquisition frame rate max. (Burst Mode)	Full Frame, 2048 × 1536 px, max. 55 fps
---	---

pixel formats	Mono8 Mono10 Mono12 Mono12 Packed
---------------	--

image preprocessing

analog controls	Gain (0 ... 48 dB) Offset (0 ... 255 LSB 12 Bit)
-----------------	---

color models	Mono
--------------	------

interfaces and connectors

data interface	Gigabit Ethernet, Transfer rate 1000 Mbts/sec, Fast Ethernet, Transfer Rate 100 Mbts/sec, Connector: 8P8C Modular Jack (RJ45), screwable type
----------------	---

process interface	M8 / 8 pins (SACC-DSI-M8MS-8CON-M8-L180)
-------------------	--

power supply	M8 / 8 pins or PoE
--------------	--------------------

mechanical data

lens mount	C-mount
width	29 mm
height	29 mm

mechanical data

depth	49 mm
weight	≤ 120 g
material	zinc die casting, nickel-plated, IP 40

electrical data

voltage supply	12 ... 24 V DC (external power supply)
range +Vs	36 ... 57 V DC (Power over Ethernet)
power consumption	approx. 2,6 W @ 12 VDC and 39,5 fps approx. 3,2 W @ 48 VDC (PoE) and 39,5 fps

non-volatile memory

flash memory size	128 kB
-------------------	--------

environmental conditions

operating temperature	+5 ... +65 °C @ T = measurement point
humidity	10 ... 90 % (non-condensing)
protection class	IP 40

digital I/Os

lines	1 input line 1 output line 2 general purpose lines
-------	--

conformity


conformity	CE RoHS KC (MISP-REI-BkR-VCXG-51C) EAC
------------	---

VCXG-32M

Gigabit Ethernet, 3,1 Megapixel, Monochrome

Article number: 11165949

dimension drawing

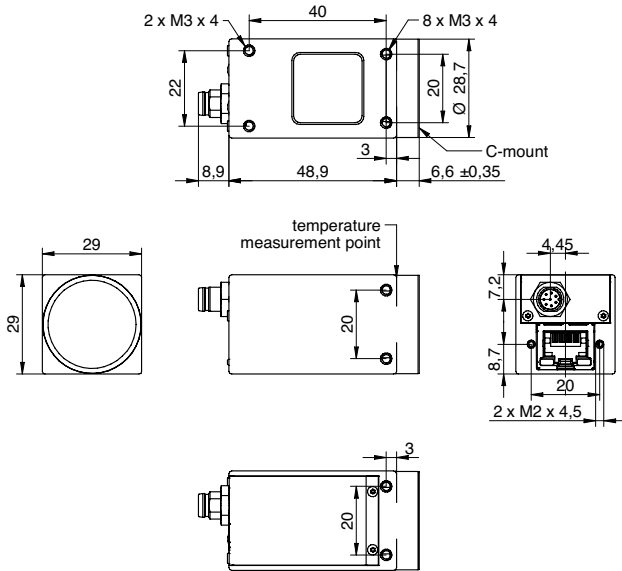

945 East 11th Avenue Tampa, FL 33605

Phone: (813) 984-0125

Contact: Sales@ pyramidimaging.com

<https://pyramidimaging.com>