




# ALDM350/2 Series DRIVER

Replaces ALDM350 series driver

- 0-10VDC Analog Control for intensity ~10% to 100%
- Current Limiting
- 24VDC
- DIN Rail Mount
- PNP/NPN Strobe or Continuous Mode

### ELECTRICAL:

Input Voltage: 24 VDC -0.5 / +4V  
 Input Current: 0.5 Amp  
 Connection: Screw terminals

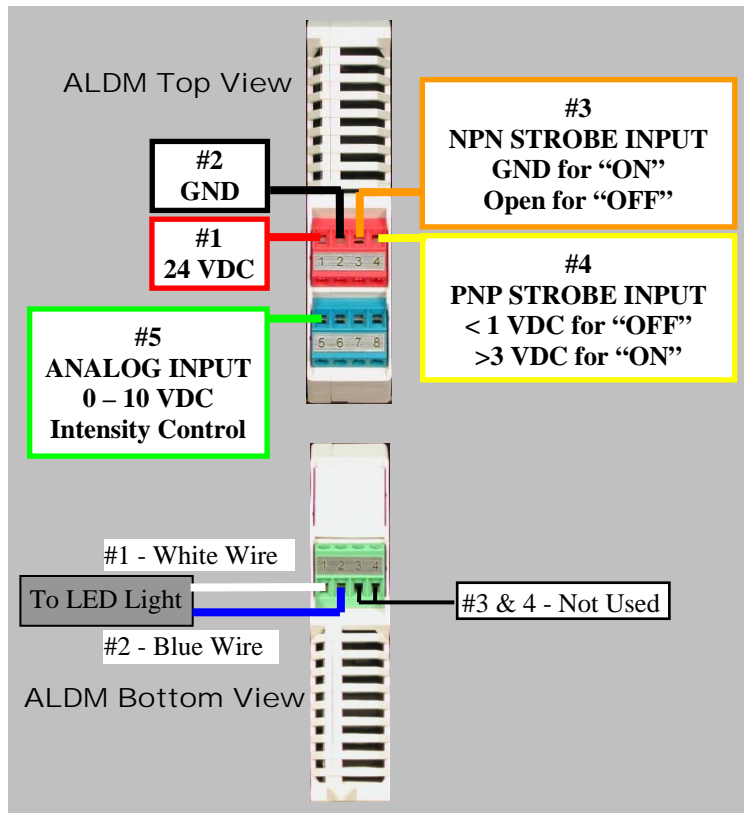

### ALDM350/2 is compatible with the following lights:

- LL16 – 850 (IR)
- SP3.25 – 850 (IR)
- RL2.5 – All Colors

### NOTE:

Jumper 24VDC to PNP Strobe Input or GND to NPN Strobe input for light to remain in constant "ON" state.


Strobe is Pulse Width Duration – Light will remain "on" for duration of signal or pulse.

**Note: Brown, Black and Green wires are not used on ALDM350/2 Driver**

### Warning!!!

**USE ONLY SPECTRUM ILLUMINATION LDM DRIVER WITH MONSTER LIGHTS.  
DO NOT CONNECT MONSTER LIGHTS DIRECTLY TO 24VDC!**

Analog Voltage vs. Light Drive Current

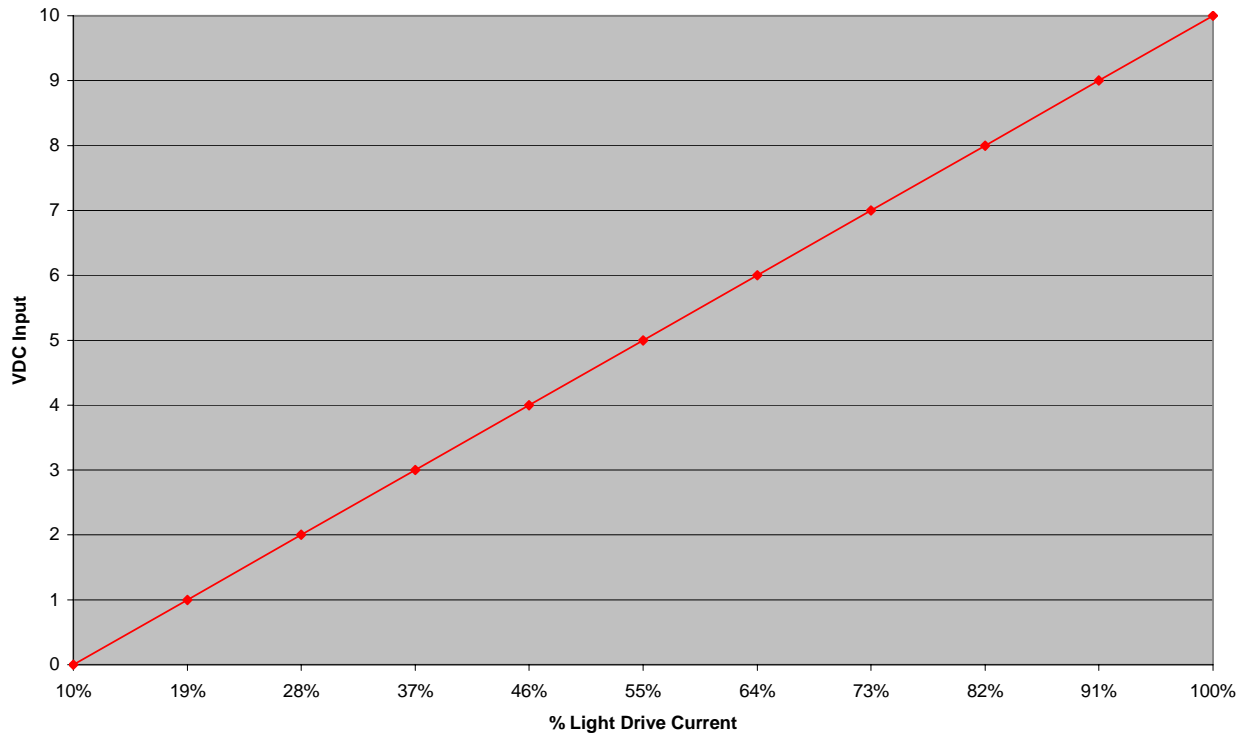

**Spectrum Illumination • 5114 Industrial Park Rd. • Montague, MI 49437**  
**Phone 231-894-4590 Fax 231-894-4582**  
[www.spectrumillumination.com](http://www.spectrumillumination.com)